
# **AeroPilates**®

LESS STRESS | MORE HEART

REFORMER 287

# **Owner's Manual**

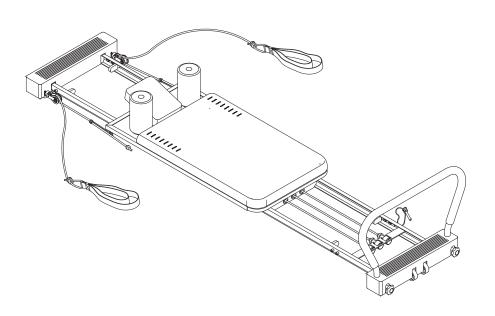

**Product May Vary Slightly From Pictured.** 

#### **CAUTION:**

Weight on this product should not exceed 300 lbs.

This Product is Distributed Exclusively by



4435 West Manufacturers Street, Springfield, MO 65803
Customer Care
1 (800) 375-7520
www.staminaproducts.com

#### **A** WARNING

- Exercise can present a health risk. Consult a physician before beginning any exercise program with this equipment. If you feel faint or dizzy, immediately discontinue use.
- Serious bodily injury can occur if this equipment is not assembled and used in accordance with the owner's manual.
- Follow all safety instructions in this owner's manual.

When calling for parts or service, please specify the following numbers:

Mod	اما	 5-4	<b>70</b>	70
IVICIC	IC: I#	 <b>n-4</b>	ZΩ	· / D

S/	1	:							

United States and/or International patents apply and/or are pending. See www.staminaproducts.com for details.

# STAMINA PRODUCTS MADE IN CHINA

© 2025 Stamina Products, Inc. 2025, 08




# ACCESS DIGITAL VERSIONS OF YOUR WORKOUT DVDS, PLUS GET AN ADDITIONAL FREE, ONLINE WORKOUT!

## **How to Access Your Videos**

- 1. Go to video.staminaproducts.com
- 2. Click REDEEM A CODE
- 3. Enter your product VIDEO CODE

Your **video code** is the model number + serial number. This info can be found on the serial decal.

\*EXAMPLE ONLY. **USE MODEL NUMBER + SERIAL NUMBER FROM THE DECAL ON YOUR PRODUCT.** 

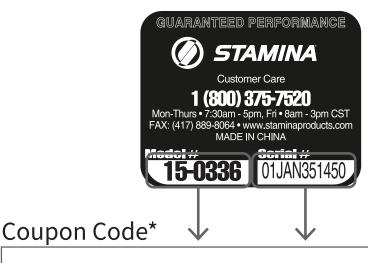

15-033601JAN351450

**REDEEM** 

Digital product only. No physical DVD will be shipped.

#### TABLE OF CONTENTS

Safety Instructions	3	Maintenance	14
Before You Begin	5	Conditioning Guidelines	15
<b>Equipment Warning, Caution &amp; Notice Labels</b>	6	Warm-Up and Cool-Down	16
Hardware Identification Chart	7	Warranty	17
Assembly Instructions	8	Product Parts Drawing	18
Operational Instructions 1	0	Parts List	19
Storage 1	4	Fax/Mail Ordering Form	22

#### SAFETY INSTRUCTIONS

⚠ WARNING Consult your physician before starting this or any exercise program. This is especially important if you are over the age of 35, have never exercised before, are pregnant, or suffer from any health problem. This product is for home use only. Do not use in institutional or commercial applications. Failure to follow all warnings and instructions could result in serious injury or death.

↑ WARNING The Tension Cords(10) contain natural rubber latex which may cause allergic reactions.

#### **WARNING**

To reduce the risk of serious injury, read the following Safety Instructions before using the AeroPilates Reformer 287.

- The AeroPilates Reformer 287 should only be used after a thorough review of the Owner's Manual by all exercisers and saved for future reference.
- Make sure that the product is properly assembled and tightened before use.
- We recommend that two people be available for assembly of this product.
- · Keep children and pets away from the AeroPilates Reformer 287 at all times. This product is for adult use only.
- When exercising on this product, do not exercise at an intensity that causes the product itself to move. This could result in damage to your joints and to the product.
- It is recommended that you place this product on an equipment mat.
- Set up and operate the AeroPilates Reformer 287 on a solid level surface. Do not position the product on loose or uneven surfaces.
- Make sure that adequate space is available for access to and around the product.
- When folding or unfolding the AeroPilates Reformer 287, keep all children away from the AeroPilates Reformer 287 and make sure your hands are clear of any folding or pinch point.
- Before using, always inspect the product for worn parts that should be replaced or loose parts that should be tightened.
- Always choose the workout which best fits your physical strength and flexibility level. Know your limits and train within them.
- Do not wear loose clothing while using the AeroPilates Reformer 287.
- Always wear proper footwear such as running, walking, or cross training shoes.
- Be careful to maintain your balance while assembling, mounting, using and dismounting the AeroPilates Reformer 287. Loss of balance may result in a fall or serious bodily injury.
- The AeroPilates Reformer 287 should not be used by persons weighing over 300 pounds.
- The AeroPilates Reformer 287 is for consumer use only. It is not for use in public or semipublic facilities.

# EXTEND YOUR PARTS WARRANTY TO 180 DAYS FROM THE DATE OF PURCHASE. REGISTER YOUR PRODUCT.



# NEED HELP? CONTACT US FIRST 1 (800) 375-7520

customer.care@staminaproducts.com

Hi! From all of us here at Stamina Products, thank you for your purchase. We know that you have big fitness goals in mind and we are here to help you along. Call us, email us, or send us a message on Facebook. Be sure to contact us if you have any questions on your new product. We look forward to hearing from you!

With your body in mind,

Stamina Customer Care

To enact your extended warranty and to help us better serve you, please **go online** and register your new product.

# register.staminaproducts.com

It is quick and easy to register online, but if you're a little old school or just need a reason to raise that little flag on your mailbox, fill out the info on the last page of this manual and mail it in.



customer.care@staminaproducts.com www.staminaproducts.com



1 (800) 375-7520



**FAX** (417) 889-8064



MAII

Stamina Products, Inc. ATTN: Customer Care 4435 West Manufacturers Street, Springfield, MO 65803

#### **BEFORE YOU BEGIN**

Thank you for choosing the AeroPilates Reformer 287. We take great pride in this quality product and hope it will provide many hours of quality exercise to make you feel better, look better, and enjoy life to its fullest.

It's a proven fact that a regular exercise program can improve your physical and mental health. Too often, our busy lifestyles limit our time and opportunity to exercise. The AeroPilates Reformer 287 provides a convenient and simple method to begin your journey of getting your body in shape and achieving a happier and healthier lifestyle.

Before reading further, please review the drawing below and familiarize yourself with the parts that are labeled. Locate the serial decal on the product and write the serial number on the cover of the manual in the space provided. See page 6 for an image of the serial decal. Model number and serial number are required when


calling for assistance.

Read this manual carefully before using the AeroPilates Reformer 287.

Providing you with a quality product is Stamina's top priority. However, sometimes there could be a missing or incorrectly sized part. If you have any questions or problems with the parts included with your AeroPilates Reformer 287, please do not return the product. Contact us FIRST!

If a part is missing or defective, please contact Customer Care for assistance. Call us toll free at 1-800-375-7520 (in the U.S.) or live chat on staminaproducts.com. Our Customer Care Staff is available to assist you from 7:30 A.M. to 5:00 P.M. (Central Time) Monday through Thursday and 8:00 A.M. to 3:00 P.M. (Central Time) on Friday.

Be sure to have the name and model number of the product available when you contact us.

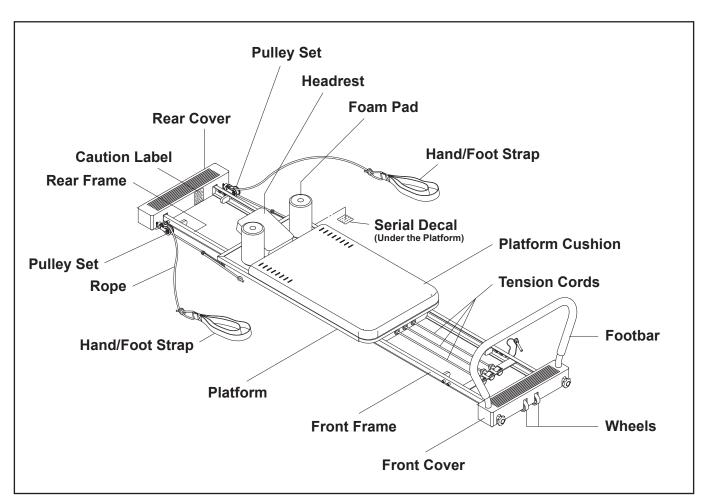

THE FOLLOWING TOOLS ARE INCLUDED FOR ASSEMBLY:



**Combination Wrench** 



**Socket Wrench** 

### EQUIPMENT WARNING, CAUTION & NOTICE LABELS

This chart is provided to help identify the warning, caution, and notice labels on the AeroPilates Reformer 287. Please take a moment to familiarize yourself with all of the warning, caution, and notice labels.

**CAUTION LABEL(51)** 

# **ACAUTION**

For consumer use only. Failure to follow all warnings and instructions could result in injury or property damage. Before assembling or using this product, read and follow the Owner's Manual and all other warnings and instructions that accompany this product. Replace this caution label if damaged, illegible, or removed.

Keep others including children & pets away from equipment when in use.

Consult your physician before starting this or any exercise program. This is especially important if you are over the age of 35 or have any pre-existing health condition. Always make sure all nuts and bolts are securely tightened before using this product. This product should not be used by person weighing more than 250 lbs. unless otherwise stated in your Owner's Manual.

**PINCH POINT CAUTION LABEL(19)** 



PINCH POINT
Keep hands clear when folding and unfolding unit.


**SERIAL DECAL(52)** 



To best serve you, our Customer Care Representatives will need your serial number. For quick access, write in your serial number on the cover of the manual.

### HARDWARE IDENTIFICATION CHART

This chart is provided to help identify the hardware used in the assembly process. Place the washers or the ends of the bolts or screws on the circles to check for the correct diameter. Use the small scale to check the length of the bolts and screws.

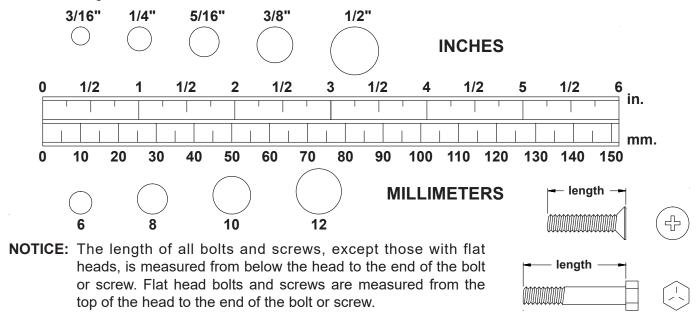

After unpacking the unit, open the hardware bag and make sure that you have all the following items. Some hardware may be already attached to the part.

Part	t Number and Description	Qty
24	Plastic Wheel	2
25	Rubber Foot	4
37	Screw, Round Head (M5 x 0.8 x 35mm)	4
40	Nylock Nut (M8 x 1.25)	2
46	Washer (M8)	6

#### ASSEMBLY INSTRUCTIONS


Place all parts from the box in a cleared area and position them on the floor in front of you. Remove all packing materials from your area and place them back into the box. Do not dispose of the packing materials until assembly is completed. Read each step carefully before beginning. If you are missing a part, please go to staminaproducts.com under the Customer Care section and order the part needed, e-mail us at customer.care@staminaproducts.com, or call us toll free at 1-800-375-7520 (in the U.S.). Our Customer Care Staff is available to assist you from 7:30 A.M. to 5:00 P.M. (Central Time) Monday through Thursday and 8:00 A.M. to 3:00 P.M. (Central Time) on Friday.

Some product parts are fit tested at the factory to ensure proper fit and alignment. Marks in the paint may be noticeable, but are not an indication of damage.

**STEP 1:** Remove your AeroPilates Reformer 287 from its packaging, placing the product on its side with the **LOCKING PIN(26)** side upward. Remove the **LOCKING PIN(26)** and unfold the **MAIN FRAME ASSEMBLY** separating the half that has the attached **LOCKING PIN(26)**. When completed, the frame should form a "V" with the frame ends separated approximately three feet.

STEP 2: Attach the four RUBBER FEET(25) to the FRONT FRAME(1) and REAR FRAME(2) with ROUND HEAD SCREWS(M5x0.8x35mm)(37). The ROUND HEAD SCREWS(M5X0.8X35mm) (37) are already in the RUBBER FEET(25). Attach the WHEELS(24) to the FRONT FRAME(1) with WASHERS(M8)(46) and NYLOCK NUTS(M8x1.25)(40).

**STEP 3:** Unfold your AeroPilates Reformer 287 to a flat position by moving the **FRONT FRAME(1)** away from the platform end of the **REAR FRAME(2)** in a clockwise position until fully extended. Lower the AeroPilates Reformer 287 so all four **RUBBER FEET(25)** are flat on the floor.

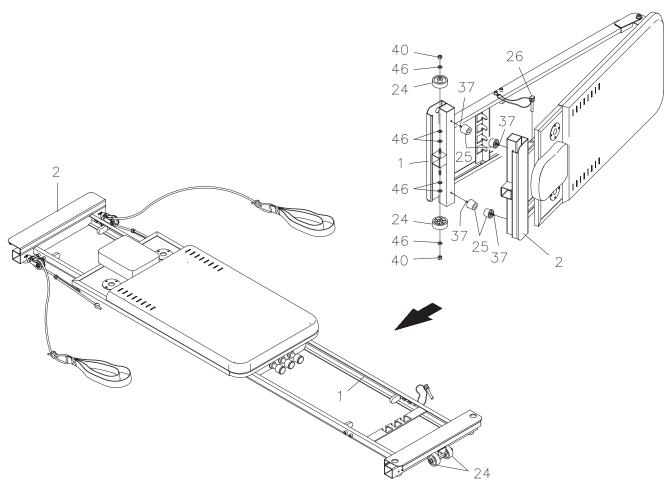

#### **ASSEMBLY INSTRUCTIONS**

#### STEP 4

Remove the paper covering from the foam tape inside the FRONT COVER(3) and REAR COVER(4). Place the FRONT COVER(3) over the end of the FRONT FRAME(1). Place the REAR COVER(4) over the end of the REAR FRAME(2). Press the covers securely in place.


NOTE: The securing SCREWS(M6x1x35mm)(36) for the PULLEY SET(22) on each side may need to be loosened to allow the REAR COVER(4) to fit securely over the frame. Refer to the inset illustration. When retightening the screws for the PULLEY SETS(22) do not over tighten. The PULLEY SETS(22) should swivel freely.

#### STEP 5

Make sure that the threaded holes in the FOOTBAR(5) are facing toward the end of the AeroPilates Reformer 287 as shown in the illustration. Insert the FOOTBAR(5) into the mounting holes located in the FRONT COVER(3) and FRONT FRAME(1). Insert the FOOTBAR(5) all the way to the bottom and lock it in place with the LOCKING KNOBS(30).

#### STEP 6


Insert the FOAM PAD ASSEMBLIES(17) into the holes located on the PLATFORM(7). Place the HAND/FOOT STRAPS(58) onto the FOAM PAD ASSEMBLIES(17) for storage.

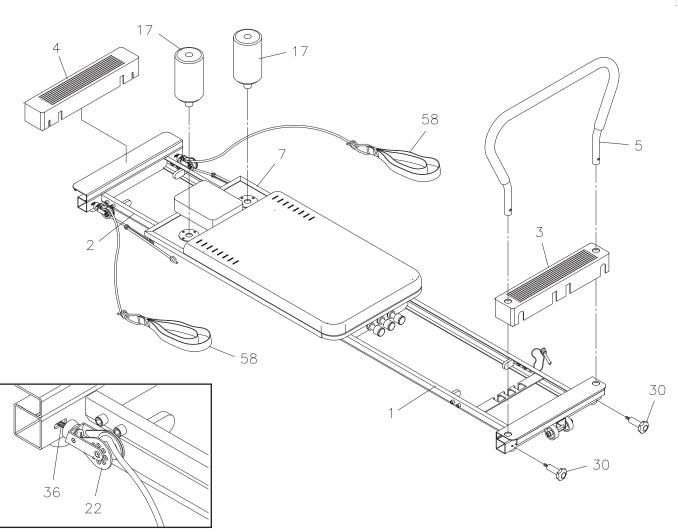

#### LOAD ADJUSTMENT


The resistance of the **PLATFORM(7)** can be adjusted by securing the **TENSION CORDS(10)** in the slots on the **FRONT FRAME(1)**. You can achieve various levels of resistance by securing different numbers of the **TENSION CORDS(10)** in the slots.

NOTE: Over time your TENSION CORDS(10) will relax. To increase resistance in the TENSION CORDS(10), stretch and re-tie the tension cords in a more taut position.

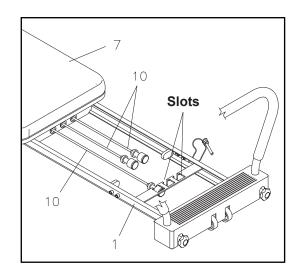


#### **HEADREST ADJUSTMENT**

The **HEADREST(15)** on the **PLATFORM(7)** can be positioned at an incline by simply pivoting the **SUPPORT BRACKET** underneath the **HEADREST(15)**.

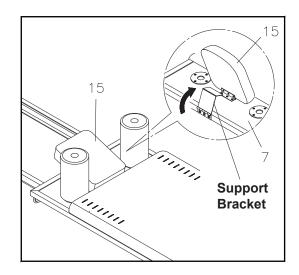

#### ROPE LENGTH ADJUSTMENT

The position of the HAND/FOOT STRAP(58) can be adjusted by sliding the ROPE(18) in the knob of the THIN ROPE(59), refer to detail view A. Pull the THIN ROPE(59) slightly back from the knob, use the Length Markings on the PLATFORM CUSHION(57) to check and adjust the end of the ROPE(18) to desired position. Be sure to adjust both ROPES(18) to the same position on both sides.

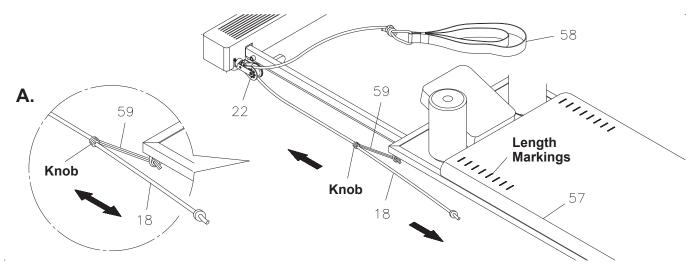

#### **CUSTOMIZING ROPE LENGTH**

Ideal rope length will vary depending on your height and limb length. To determine your ideal rope length, begin by placing the hand/foot straps over the shoulder rests as shown below. Adjust the ropes so they are taut. For complete rope length adjustment instructions, see additional Rope Length Adjustment instructions in this Owner's Manual.



Next, lie on the reformer with your hands in the straps with shoulders against the shoulder rests. Reach your hands toward the ceiling until they are directly over the back edge of the reformer platform as shown below. In this position, the reformer platform should be at rest with no tension on the ropes. If there is still tension on the ropes in this position, lengthen the ropes. If you lose tension before reaching the arm position shown below, shorten the ropes.



#### RESISTANCE CORD STRENGTH

The approximate maximum resistance provided by each cord is outlined in the chart below. Frequency of use, type of use and user weight will have an effect on the strength of your cords. Over time cord strength will gradually decrease. If your reformer is under the 90 day warranty, replacement cords are available by contacting Stamina customer care at customer.care@staminaproducts.com. If your reformer is not under warranty or you would like to add different tension cords, you can purchase new cords by visiting our website www.aeropilates.com.


TENSION CORDS	CORD RESISTANCE
YELLOW	approximately 16 pounds
BLACK	approximately 24 pounds
RED	approximately 34 pounds

#### **TENSION CORD SELECTION**

The AeroPilates workout wall chart and workout DVDs indicate which cords to use for each exercise.


#### TENSION CORD REPLACEMENT

To replace or add a tension cord, first carefully release the platform and tip your machine on its side. Untie the knot that secures the cord you are replacing and simply pull it out. Thread the new cord through the metal holes from the end of the platform to the other end.






Pull tightly on the cord stretching it to the point that allows you to tie a double knot, and release the cord into place.










#### PLATFORM ROLLER REPLACEMENT

To replace a platform roller, first remove the platform by releasing the cords and sliding the platform all the way back to the top end or rear frame of the machine. Tip your machine on its side, bend the machine at the hinge, and simply slide the platform off the frame.



Turn the platform upside down so it is cord side up. Using a crescent wrench and flat head screwdriver, remove the screw that is holding the roller in place. Replace the old roller with the new one, add the washer, push the screw through the roller and tighten with the nut. Do not overtighten the nut and make sure the roller turns easily.









#### **WEBSITE RESOURCES**

You can find use and maintenance instructional video clips at www.staminaproducts.com and www.aeropilates.com.

#### **STORAGE**

- To store the AeroPilates Reformer 287, simply keep it in a clean dry place.
- The FRONT FRAME(1) of the AeroPilates Reformer 287 has built-in WHEELS(24) for easy moving. To move, be sure at least one of the TENSION CORDS(10) is attached to prevent the PLATFORM(7) from sliding, then lift from the end of the REAR FRAME(2) and roll.
- The AeroPilates Reformer 287 folds for storage. To fold, be sure no TENSION CORDS(10) are attached and slide the PLATFORM(7) to the end of the REAR FRAME(2). Remove the FOOTBAR(5) and FOAM PAD ASSEMBLIES(17), then lift the AeroPilates Reformer 287 onto its side with the LOCKING PIN(26) side up. With the machine hinging in the middle, move the FRONT FRAME(1) toward the REAR FRAME(2) until the frame ends meet. Insert the LOCKING PIN(26) into the hole in the REAR FRAME(2), and the AeroPilates Reformer 287 is ready to store.

**A** CAUTION Keep hands clear of the hinge when folding and unfolding the unit.

#### **MAINTENANCE**

The safety and integrity designed into the AeroPilates Reformer 287 can only be maintained when the AeroPilates Reformer 287 is regularly examined for damage and wear. Special attention should be given to the following:

- It is the sole responsibility of the user/owner to ensure that regular maintenance is performed.
- Worn or damaged components must be replaced immediately or the AeroPilates Reformer 287 should be removed from service until repair is made.
- Verify that the **CAUTION LABEL(51)** is in place and easy to read. Call Stamina Products immediately at 1-800-375-7520 for a replacement **CAUTION LABEL(51)** if it is missing or damaged.
- Verify that the ROPES(18) are properly installed on the PULLEY SETS(22).
- Check the condition of the ROPES(18) and replace if they are frayed or worn.
- Check the **TENSION CORDS(10)**. If any of the **TENSION CORDS(10)** are stretched and loose, re-tie the knot on the end of the cord. Replace **TENSION CORDS(10)** that are frayed or worn.
- Check the PULLEY SETS(22) for excessive wear. Replace worn PULLEY SETS(22).
- Check the **HAND/FOOT STRAPS(58)** for damage. Replace damaged parts.
- Check the FOAM SLEEVE(6) and FOAM PADS(17) and replace if damaged or worn.
- Check the STOP PLATES(27) for looseness or damage and replace any damaged parts.
- Check the **PLATFORM CUSHION(57)** and replace if it is damaged or worn.
- Check and clean the ROLLERS(8) and the rolling surfaces on the rails. Clean by wiping with a dry cloth.
- Only Stamina Products supplied components should be used to maintain/repair the AeroPilates Reformer 287.
- Keep your AeroPilates Reformer 287 clean by wiping it off with an absorbent cloth after use.

#### **CONDITIONING GUIDELINES**

How you begin your exercise program depends on your physical condition. If you have been inactive for several years or are severely overweight, start slowly and increase your workout time gradually. Increase your workout intensity gradually by monitoring your heart rate while you exercise.


Remember to follow these essentials:

- Have your doctor review your training and diet programs.
- Begin your training program slowly with realistic goals that have been set by you and your physician.
- Warm up before you exercise and cool down after you work out.
- Take your pulse periodically during your workout and strive to stay within a range of 60% (lower intensity) to 90% (higher intensity) of your maximum heart rate zone. Start at the lower intensity, and build up to higher intensity as you become more aerobically fit.
- If you feel dizzy or lightheaded you should slow down or stop exercising.

Initially you may only be able to exercise within your target zone for a few minutes; however, your aerobic capacity will improve over the next six to eight weeks. It is important to pace yourself while you exercise so you don't tire too quickly.

To determine if you are working out at the correct intensity, use a heart rate monitor or use the table below. For effective aerobic exercise, your heart rate should be maintained at a level between 60% and 90% of your maximum heart rate. If just starting an exercise program, work out at the low end of your target heart rate zone. As your aerobic capacity improves, gradually increase the intensity of your workout by increasing your heart rate.

Measure your heart rate periodically during your workout by stopping the exercise but continuing to move your legs or walk around. Place two or three fingers on your wrist and take a six second heartbeat count. Multiply the results by ten to find your heart rate. For example, if your six second heartbeat count is 14, your heart rate is 140 beats per minute. A six second count is used because your heart rate will drop rapidly when you stop exercising. Adjust the intensity of your exercise until your heart rate is at the proper level.



Target Heart Rate Zone Estimated by Age\*

Age	Target Heart Rate Zone (55%-90% of Maximum Heart Rate)	Average Maximum Heart Rate 100%
20 years	110-180 beats per minute	200 beats per minute
25 years	107-175 beats per minute	195 beats per minute
30 years	105-171 beats per minute	190 beats per minute
35 years	102-166 beats per minute	185 beats per minute
40 years	99-162 beats per minute	180 beats per minute
45 years	97-157 beats per minute	175 beats per minute
50 years	94-153 beats per minute	170 beats per minute
55 years	91-148 beats per minute	165 beats per minute
60 years	88-144 beats per minute	160 beats per minute
65 years	85-139 beats per minute	155 beats per minute
70 years	83-135 beats per minute	150 beats per minute

<sup>\*</sup> For cardiorespiratory training benefits, the American College of Sports Medicine recommends working out within a heart rate range of 55% to 90% of maximum heart rate. To predict the maximum heart rate, the following formula was used: 220 - Age = predicted maximum heart rate

## WARM-UP and COOL-DOWN

**Warm-Up** The purpose of warming up is to prepare your body for exercise and to minimize injuries. Warm up for two to five minutes before strength training or aerobic exercising. Perform activities that raise your heart rate and warm the working muscles. Activities may include brisk walking, jogging, jumping jacks, jump rope, and running in place.

**Cool-Down** The purpose of cooling down is to return the body to its normal, or near normal, resting state at the end of each exercise session. A proper cool-down slowly lowers your heart rate and allows blood to return to the heart. Your cool down should be completed after each strength training session.

**MODEL 55-4287B** 

#### WARRANTY

Stamina Products, Inc. ("Stamina") warrants to the original purchaser that this product will be free from defects in materials and workmanship that arise under normal use, service, proper assembly and proper operation in accordance with product warnings/instructions for a period of 90 days on the parts and three years on the frame from the date of the original purchase from an authorized retailer. THIS WARRANTY SHALL NOT APPLY TO ANY PRODUCT WHICH HAS BEEN SUBJECT TO COMMERCIAL USE, ABUSE, MISUSE, ALTERATION OF ANY KIND OR TO ANY DEFECT OR CHANGE CAUSED BY IMPROPER ASSEMBLY, REPAIR, REPLACEMENT, SUBSTITUTION OR USE WITH PARTS NOT PROVIDED BY STAMINA. Commercial use includes use of product in athletic clubs, health clubs, spas, gyms, and all other public or semipublic facilities whether or not the product's use is in furtherance of a profit making enterprise, and all other use which is not for personal purposes.

To implement this limited warranty, send a written notice stating your name, date, and place of purchase and a brief description of the defect along with your receipt to Stamina Products, Inc. 4435 West Manufacturers Street, Springfield, Missouri, USA, MO 65803, or email us at customer. care@staminaproducts.com, or call us at 1-800-375-7520. If the defect is covered under this limited warranty, you will be requested to return the product or part to us for free repair or replacement at our option.


NO ACTION FOR BREACH OF THIS LIMITED WARRANTY MAY BE COMMENCED MORE THAN ONE (1) YEAR AFTER THE DATE THE ALLEGED BREACH WAS OR SHOULD HAVE BEEN DISCOVERED. NO ACTION FOR BREACH OF ANY IMPLIED WARRANTY (INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE) MAY BE COMMENCED MORE THAN ONE (1) YEAR AFTER DELIVERY OF THE PRODUCT TO THE PURCHASER. These warranties are not transferable. IF ANY PART OF THE PRODUCT IS NOT IN COMPLIANCE WITH THIS LIMITED WARRANTY OR ANY IMPLIED WARRANTY, THE REMEDY OF REPAIR OR REPLACEMENT IS THE EXCLUSIVE REMEDY. If any claim is made under this limited warranty or any implied warranty, Stamina reserves the right to require the product to be returned for inspection, at the purchaser's expense, to Stamina's premises in Springfield, Missouri. Return of the enclosed warranty registration card is not required for warranty coverage, but is merely a way of establishing the date and place of purchase.

Stamina SHALL NOT BE LIABLE FOR THE LOSS OF USE OF ANY PRODUCT, LOSS OF TIME, INCONVENIENCE, COMMERCIAL LOSS OR ANY OTHER INDIRECT, CONSEQUENTIAL, SPECIAL OR INCIDENTAL DAMAGES DUE TO BREACH OF THE ABOVE WARRANTY OR ANY IMPLIED WARRANTY.

THIS LIMITED WARRANTY IS THE ONLY EXPRESS WARRANTY. NO ORAL OR WRITTEN INFORMATION GIVEN BY STAMINA, ITS AGENTS OR EMPLOYEES, SHALL CREATE A WARRANTY OR IN ANY WAY INCREASE THE SCOPE OF THIS WARRANTY. This warranty gives you specific legal rights, and you may also have other legal rights which vary from state to state. ANY OTHER RIGHT WHICH YOU MAY HAVE, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, IS LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY.

The laws in some states affect the disclaimer or limitation of implied warranties and consequential and incidental damages. If any such law is found applicable, the foregoing disclaimers and limitations of and on implied warranties and consequential and incidental damages shall be deemed to be modified to the extent necessary to comply with applicable law.

## PRODUCT PARTS DRAWING

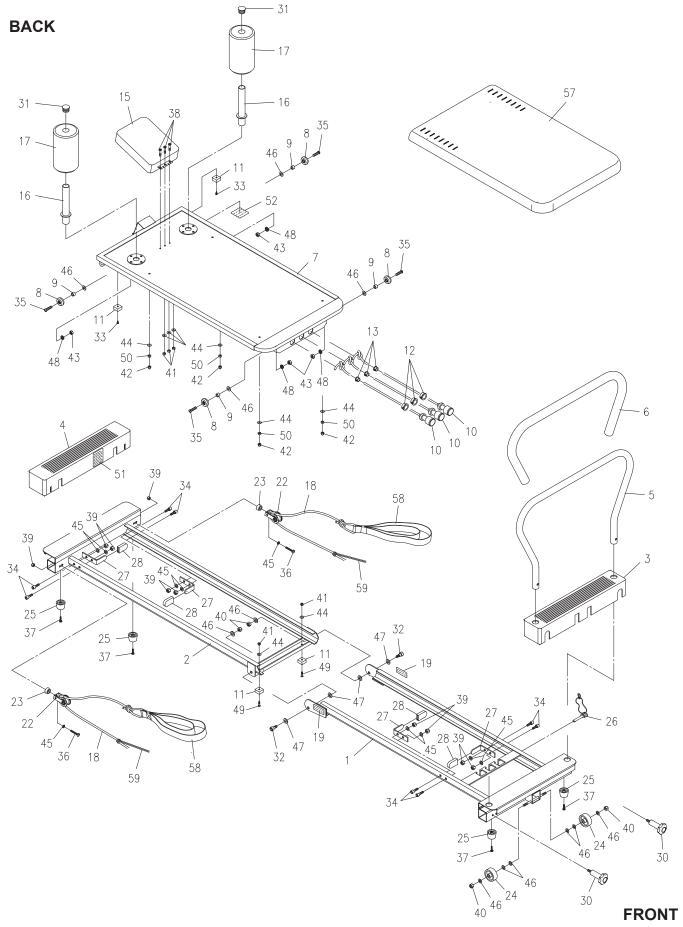

## PARTS LIST

1         Front Frame         1           2         Rear Frame         1           3         Front Cover         1           4         Rear Cover         1           5         Footbar         1           6         Foam Sleeve         1           7         Platform         1           8         Roller         4           9         Roller Spacer         4           10         Tension Cord         3           11         Rubber Stand         4           12         Support Bushing         3           13         Stop Bushing         3           13         Stop Bushing         3           15         Headrest         1           16         Foam Pad Tube         2           17         Foam Pad         2           18         Rope         2           19         Pinch Point Caution Label         2           22         Pulley Set         2           23         Pulley Spacer         2           24         Wheel         2           25         Rubber Foot         4           26         Locking Knob	PART#	PART NAME	QTY
3         Front Cover         1           4         Rear Cover         1           5         Footbar         1           6         Foam Sleeve         1           7         Platform         1           8         Roller         4           9         Roller Spacer         4           10         Tension Cord         3           11         Rubber Stand         4           12         Support Bushing         3           13         Stop Bushing         3           13         Stop Bushing         3           15         Headrest         1           16         Foam Pad Tube         2           17         Foam Pad         2           18         Rope         2           19         Pinch Point Caution Label         2           22         Pulley Spacer         2           23         Pulley Spacer         2           24         Wheel         2           25         Rubber Foot         4           26         Locking Fnot         4           28         Stop Pad         4           30         Locking Knob<	1	Front Frame	1
4 Rear Cover 5 Footbar 6 Foam Sleeve 1 7 7 Platform 8 Roller 9 Roller Spacer 10 Tension Cord 3 Tension Cord 4 Tension Cord 4 Tension Cord 5 Tension Cord 6 Tension Cord 7 T		Rear Frame	1
5         Footbar         1           6         Foam Sleeve         1           7         Platform         1           8         Roller         4           9         Roller Spacer         4           10         Tension Cord         3           11         Rubber Stand         4           12         Support Bushing         3           13         Stop Bushing         3           15         Headrest         1           16         Foam Pad Tube         2           17         Foam Pad         2           18         Rope         2           19         Pinch Point Caution Label         2           22         Pulley Set         2           23         Pulley Spacer         2           24         Wheel         2           25         Rubber Foot         4           26         Locking Pin         1           27         Stop Plate         4           28         Stop Pad         4           30         Locking Knob         2           31         Round Plug (25mm)         2           32         Shaft Bol			
6         Foam Sleeve         1           7         Platform         1           8         Roller         4           9         Roller Spacer         4           10         Tension Cord         3           11         Rubber Stand         4           12         Support Bushing         3           13         Stop Bushing         3           15         Headrest         1           16         Foam Pad Tube         2           17         Foam Pad Tube         2           18         Rope         2           19         Pinch Point Caution Label         2           19         Pinch Point Caution Label         2           22         Pulley Set         2           23         Pulley Spacer         2           24         Wheel         2           25         Rubber Foot         4           26         Locking Pin         1           27         Stop Plate         4           28         Stop Pad         4           30         Locking Knob         2           31         Round Plug (25mm)         2           32 <td></td> <td></td> <td></td>			
7         Platform         1           8         Roller         4           9         Roller Spacer         4           10         Tension Cord         3           11         Rubber Stand         4           12         Support Bushing         3           13         Stop Bushing         3           15         Headrest         1           16         Foam Pad Tube         2           17         Foam Pad         2           18         Rope         2           19         Pinch Point Caution Label         2           22         Pulley Set         2           23         Pulley Spacer         2           24         Wheel         2           25         Rubber Foot         4           26         Locking Pin         1           27         Stop Plate         4           28         Stop Pad         4           30         Locking Knob         2           31         Round Plug (25mm)         2           32         Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)         2           33         Screw, Round Head (M8 x 1.25 x 30mm)         4 <td></td> <td></td> <td></td>			
8       Roller Spacer       4         10       Tension Cord       3         11       Rubber Stand       4         12       Support Bushing       3         13       Stop Bushing       3         15       Headrest       1         16       Foam Pad Tube       2         17       Foam Pad       2         18       Rope       2         19       Pinch Point Caution Label       2         22       Pulley Set       2         23       Pulley Spacer       2         24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M6 x 1 x 14mm)       8         34       Bolt, Rocket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M6 x 1 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x			
9 Roller Spacer 10 Tension Cord 3 11 Rubber Stand 4 12 Support Bushing 3 13 Stop Bushing 15 Headrest 16 Foam Pad Tube 2 17 Foam Pad 18 Rope 2 19 Pinch Point Caution Label 2 22 Pulley Set 2 23 Pulley Spacer 2 24 Wheel 2 25 Rubber Foot 4 Cocking Pin 2 7 Stop Plate 2 8 Stop Pad 3 0 Locking Knob 3 1 Round Plug (25mm) 3 2 Shaft Bolt, Socket Head (M8 x 1.25 x 20mm) 3 2 Shaft Bolt, Socket Head (M4 x 12mm) 2 3 4 Bolt, Socket Head (M8 x 1.25 x 30mm) 3 5 Bolt, Round Head (M6 x 1 x 14mm) 3 6 Screw, Round Head (M6 x 1 x 35mm) 4 Screw, Round Head (M5 x 0.8 x 35mm) 4 Screw, Round Head (M5 x 0.8 x 35mm) 4 Screw, Flat Head (M5 x 0.8 x 25mm) 5 Wylock Nut (M6 x 1) 4 Nylock Nut (M6 x 1) 4 Nylock Nut (M6 x 1.25) 4 Nut (M8 x 1.25) 4 Acorn Nut (M5 x 0.8) 4 Acorn Nut (M5 x 0.8) 4 Acorn Nut (M5 x 0.8) 4 Washer (M5) 4 Washer (M6) 4 Washer (M6) 4 Washer (M8) 4 Screw, Filat Head (M8) 5 Caution Label 5 Nut (M5 x 0.8) 4 Screw, Filat Head (M5 x 0.8 x 16mm) 5 Washer (M6) 6 Washer (M8) 7 Washer (M10) 7 Washer (M10) 7 Washer (M10) 7 Caution Label 7 Caution Label 7 Caution Label			
10       Tension Cord       3         11       Rubber Stand       4         12       Support Bushing       3         13       Stop Bushing       3         15       Headrest       1         16       Foam Pad Tube       2         17       Foam Pad       2         18       Rope       2         19       Pinch Point Caution Label       2         22       Pulley Set       2         23       Pulley Spacer       2         24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Flat Head (M5 x 0.8 x 2			
11       Rubber Stand       4         12       Support Bushing       3         13       Stop Bushing       3         15       Headrest       1         16       Foam Pad Tube       2         17       Foam Pad       2         18       Rope       2         19       Pinch Point Caution Label       2         22       Pulley Set       2         23       Pulley Spacer       2         24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       8         34       Bolt, Socket Head (M6 x 1 x 44mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M8 x 1.25 x 30mm)       4         37       Screw, Round Head (M6 x 1 x 35mm)       2         38<		·	
12       Support Bushing       3         13       Stop Bushing       3         15       Headrest       1         16       Foam Pad Tube       2         17       Foam Pad       2         18       Rope       2         19       Pinch Point Caution Label       2         22       Pulley Set       2         23       Pulley Spacer       2         24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M6 x 1 x 35mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       4         37       Screw, Round Head (M5 x 0.8 x 25mm)       3 <t< td=""><td></td><td></td><td></td></t<>			
13       Stop Bushing       3         15       Headrest       1         16       Foam Pad Tube       2         17       Foam Pad       2         18       Rope       2         19       Pinch Point Caution Label       2         22       Pulley Set       2         23       Pulley Spacer       2         24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M6 x 1 x 35mm)       2         34       Bolt, Round Head (M8 x 1.25 x 30mm)       4         35       Bolt, Round Head (M5 x 0.8 x 35mm)       4         36       Screw, Round Head (M5 x 0.8 x 25mm)       3         37       Screw, Round Head (M5 x 0.8 x 25mm)       3         38       Screw, Flat Head (M5 x 0.			
15       Headrest       1         16       Foam Pad Tube       2         17       Foam Pad       2         18       Rope       2         19       Pinch Point Caution Label       2         22       Pulley Set       2         23       Pulley Spacer       2         24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M6 x 1 x 14mm)       8         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 25mm)       3         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1) </td <td></td> <td>• • • • • • • • • • • • • • • • • • • •</td> <td>3</td>		• • • • • • • • • • • • • • • • • • • •	3
16       Foam Pad Tube       2         17       Foam Pad       2         18       Rope       2         19       Pinch Point Caution Label       2         22       Pulley Set       2         23       Pulley Spacer       2         24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Flat Head (M5 x 0.8 x 25mm)       3         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M6		•	
17       Foam Pad       2         18       Rope       2         19       Pinch Point Caution Label       2         22       Pulley Set       2         23       Pulley Spacer       2         24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M8 x 1.25 x 30mm)       4         37       Screw, Round Head (M8 x 1.25 x 30mm)       4         38       Screw, Round Head (M8 x 1.25 x 30mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M6 x 1 x 35mm)       4         39       Nylock Nut (M6 x 1.)       10         40       Nylock Nu			
18       Rope       2         19       Pinch Point Caution Label       2         22       Pulley Set       2         23       Pulley Spacer       2         24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M8 x 1.25 x 30mm)       4         37       Screw, Round Head (M5 x 0.8 x 35mm)       4         38       Screw, Round Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M5 x 0.8)       5         41       Nylock Nut (M5 x 0.8)       4         42       Acorn Nut (M5 x 0.8)       4         43       Nut			
19       Pinch Point Caution Label       2         22       Pulley Set       2         23       Pulley Spacer       2         24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M6 x 1 x 14mm)       8         36       Screw, Round Head (M6 x 1 x 35mm)       4         37       Screw, Round Head (M5 x 0.8 x 35mm)       4         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44 <td< td=""><td></td><td></td><td></td></td<>			
22       Pulley Set       2         23       Pulley Spacer       2         24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 25mm)       3         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       5         43       Nut (M8 x 1.25)       4         44 <td></td> <td>·</td> <td></td>		·	
23       Pulley Spacer       2         24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M8 x 1.25 x 30mm)       4         37       Screw, Round Head (M5 x 0.8 x 35mm)       2         37       Screw, Flat Head (M5 x 0.8 x 25mm)       3         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M6)       10			
24       Wheel       2         25       Rubber Foot       4         26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M6 x 1 x 14mm)       8         36       Screw, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 25mm)       3         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M6 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M6)       10         45       Washer (M8)       12         47 <td></td> <td>·</td> <td></td>		·	
26       Locking Pin       1         27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       8         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 35mm)       4         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2 <t< td=""><td></td><td>·</td><td></td></t<>		·	
27       Stop Plate       4         28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 35mm)       4         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       5         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4	25	Rubber Foot	
28       Stop Pad       4         30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M5 x 0.8 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 35mm)       4         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       5         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4      <	26	Locking Pin	1
30       Locking Knob       2         31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 35mm)       4         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       5         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1	27	Stop Plate	4
31       Round Plug (25mm)       2         32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M5 x 0.8 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 25mm)       3         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1	28	Stop Pad	4
32       Shaft Bolt, Socket Head (M8 x 1.25 x 20mm)       2         33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 35mm)       4         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M8)       12         47       Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1	30	Locking Knob	
33       Screw, Round Head (M4 x 12mm)       2         34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 35mm)       4         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		<u> </u>	
34       Bolt, Socket Head (M6 x 1 x 14mm)       8         35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 35mm)       4         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		,	
35       Bolt, Round Head (M8 x 1.25 x 30mm)       4         36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 35mm)       4         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M8)       12         47       Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		,	
36       Screw, Round Head (M6 x 1 x 35mm)       2         37       Screw, Round Head (M5 x 0.8 x 35mm)       4         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		,	
37       Screw, Round Head (M5 x 0.8 x 35mm)       4         38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		,	
38       Screw, Flat Head (M5 x 0.8 x 25mm)       3         39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1			
39       Nylock Nut (M6 x 1)       10         40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		,	
40       Nylock Nut (M8 x 1.25)       4         41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		,	
41       Nylock Nut (M5 x 0.8)       5         42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		, ,	
42       Acorn Nut (M5 x 0.8)       4         43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		·	
43       Nut (M8 x 1.25)       4         44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1			
44       Washer (M5)       9         45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		,	
45       Washer (M6)       10         46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		,	
46       Washer (M8)       12         47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		` '	
47       Washer (M10)       4         48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		, ,	
48       Lock Washer (M8)       4         49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		` ,	
49       Screw, Flat Head (M5 x 0.8 x 16mm)       2         50       Nut (M5 x 0.8)       4         51       Caution Label       1		` ,	
50 Nut (M5 x 0.8) 4 51 Caution Label 1		` ,	
51 Caution Label 1		,	
		,	
	52	Serial Decal	1

## PARTS LIST

PART#	PART NAME	QTY
53	Combination Wrench	1
54	Socket Wrench	1
55	Manual	1
56	Workout Chart	1
57	Platform Cushion	1
58	Hand/Foot Strap	2
59	Thin Rope	2

# **Accessories for the 55-4287**



**Double Loop Straps** and Bag



AeroPilates® Power Cord (Double)



AeroPilates® Yellow **Light Cord** 



AeroPilates® Head and **Neck Support Pillow** 



AeroPilates® Box and Pole



AeroPilates® **Equipment Mat** 



AeroPilates® Cardio Rebounder



AeroPilates® Stand -Medium



AeroPilates® Magic Circle



To see all Aeropilates accessories, scan the QR code or visit staminaproducts.com/products/ aeropilates/accessories/



#### TO CONTACT CUSTOMER CARE

For your convenience, Stamina's customer care representatives can be reached by email at **customer.care@staminaproducts. com** or by phone at 1-800-375-7520 (in the U.S.). Our customer care representatives are available Monday through Thursday from 7:30 a.m. until 5:00 p.m., and Friday 8:00 a.m. until 3 p.m. Central Time.



PRODUCT REGISTRATION FORM

TELEPHONE CUSTOMER CARE Tel: 1 (800) 375-7520



FAX CUSTOMER CARE Fax: (417) 889-8064



STAMINA PRODUCTS, INC. ATTN: Customer Care 4435 West Manufacturers Street, Springfield, MO 65803

Would you like to recieve email information or special offers from Stamina Products? Register at contact.staminaproducts.com

#### TO REGISTER YOUR PRODUCT

To enact your warranty, please register your product by going to register.staminaproducts.com. Please have your product model number (printed on the cover of this owner's manual) and the serial number (printed on the black and white sticker on your product) ready.

If you don't have internet access, you can call customer care at 1-800-375-7520, or fill out and mail the product registration form below to Stamina Products, Inc.; 4435 West Manufacturers Street, Springfield, MO 65803.

Stamina Products, Inc. 4435 West Manufacturers Street, Springfield, MO 65803

Model Number:	Serial Number:	
Product Name:		
Place Purchased:		
Date of Purchase:	Purchase Price:	
First Name:	Last Name:	
City:	State: Zip Code:	
Email Address:	Phone #: ( )	
Would you like to receive email information	ation or special offers from Stamina Products?*YesNo *If yes, be sure your ema	il address is included above.
	Detach and Mail or Fax the Form Above	
TO ORDER PARTS		
	parts, you can go to parts.staminaproducts.com and order those parts. Do not return the product. To order parts by mail, fill out the shailed to your address.	
<b>\$</b>	Detach and Mail or Fax the Form Below	fo
	Stamina Products, Inc.	
	Stamina Products, Inc. 4435 West Manufacturers Street, Springfield, MO 65803	
Mr./Ms:	Stamina Products, Inc. 4435 West Manufacturers Street, Springfield, MO 65803	
Mr./Ms:Address:	Stamina Products, Inc. 4435 West Manufacturers Street, Springfield, MO 65803  Apt. #:	
Mr./Ms:	Stamina Products, Inc. 4435 West Manufacturers Street, Springfield, MO 65803  Apt. #:	
Mr./Ms:	Stamina Products, Inc. 4435 West Manufacturers Street, Springfield, MO 65803  Apt. #:	
Mr./Ms:	Stamina Products, Inc. 4435 West Manufacturers Street, Springfield, MO 65803  Apt. #:	
Mr./Ms:	Stamina Products, Inc. 4435 West Manufacturers Street, Springfield, MO 65803  Apt. #:	
Mr./Ms:	Stamina Products, Inc. 4435 West Manufacturers Street, Springfield, MO 65803  Apt. #:	
Mr./Ms:	Stamina Products, Inc. 4435 West Manufacturers Street, Springfield, MO 65803  Apt. #:	
Mr./Ms:	Stamina Products, Inc. 4435 West Manufacturers Street, Springfield, MO 65803  Apt. #:  State: Zip Code:  We require your phone number to process the order!  Work Phone #: ( )	
Mr./Ms: Address: City: IMPORTANT: Phone #: ( )	Stamina Products, Inc.  4435 West Manufacturers Street, Springfield, MO 65803  Apt. #:	1.
Mr./Ms:	Stamina Products, Inc.  4435 West Manufacturers Street, Springfield, MO 65803  Apt. #:	n.
Mr./Ms:	Stamina Products, Inc.  4435 West Manufacturers Street, Springfield, MO 65803  Apt. #:	n.
Mr./Ms:	Stamina Products, Inc.  4435 West Manufacturers Street, Springfield, MO 65803  Apt. #:	n.