
STAMINA X ROWER



Download the müüv app for a step-by-step assembly video

Owner's Manual

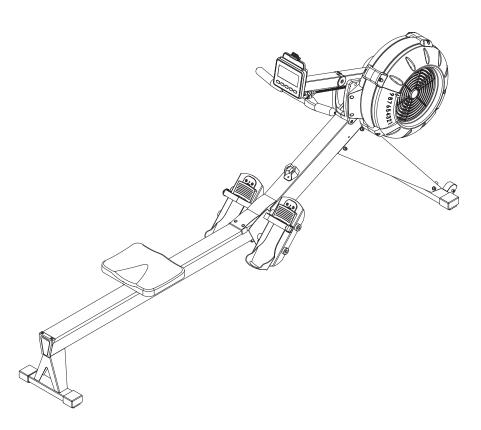

Product May Vary Slightly From Pictured.

CAUTION:

Weight on this product should not exceed 300 lbs.

This Product is Distributed Exclusively by



2040 N Alliance Ave, Springfield, MO 65803 Customer Care 1 (800) 375-7520 www.staminaproducts.com

A WARNING

- Exercise can present a health risk. Consult a physician before beginning any exercise program with this equipment. If you feel faint or dizzy, immediately discontinue use.
- Serious bodily injury can occur if this equipment is not assembled and used in accordance with the owner's manual.
- Follow all safety instructions in this owner's manual.

When calling for parts or service, please specify the following numbers:

Model#: 35-1423D

S	/N							

STAMINA PRODUCTS
MADE IN CHINA

© 2023 Stamina Products, Inc. 2023, 10

Quickstart Guide

Smart Audio Workouts for Your Rower



Go to the App Store on your device or scan the QR Code for quick access.





Download the app and get moving! Assembly video included in app.

TABLE OF CONTENTS

Safety Instructions 3	Maintenance 23
Before You Begin 5	Conditioning Guidelines 25
Equipment Warning, Caution & Notice Labels 6	Warm-Up and Cool-Down 26
Hardware Identification Chart 7	Warranty 27
Assembly Instructions 8	Product Parts Drawing 28
Computer Instructions 12	Parts List 29
Operational Instructions 20	Fax/Mail Ordering Form 33
Storage 22	•

SAFETY INSTRUCTIONS

⚠ WARNING Cancer and Reproductive Harm www.P65Warnings.ca.gov

A WARNING Consult your physician before starting this or any exercise program. This is especially important if you are over the age of 35, have never exercised before, are pregnant, or suffer from any health problem. This product is for home use only. Do not use in institutional or commercial applications. Failure to follow all warnings and instructions could result in serious injury or death.

A WARNING To reduce the risk of serious injury, read the following Safety Instructions before using the STAMINA X AMRAP ROWER.

- The STAMINA X AMRAP ROWER should only be used after a thorough review of the Owner's Manual by all exercisers and saved for future reference.
- Make sure that the product is properly assembled and tightened before use.
- We recommend that two people be available for assembly of this product.
- Keep children and pets away from the STAMINA X AMRAP ROWER at all times. This product is for adult use only.
- It is recommended that you place this product on an equipment mat.
- Set up and operate the STAMINA X AMRAP ROWER on a solid level surface. Do not position the product on loose or uneven surfaces.
- Make sure that adequate space is available for access to and around the STAMINA X AMRAP ROWER.
- Keep fingers clear of all pinch points when folding and unfolding the STAMINA X AMRAP ROWER.
- Before using, always inspect the product for worn parts that should be replaced or loose parts that should be tightened.
- Before using, check the condition of the CHAIN(36). Replace the CHAIN(36) if it is cracked or broken.
- Do not use the SEAT(51) to move the STAMINA X AMRAP ROWER. The SEAT(51) will move and the SEAT CARRIAGE(10) may pinch your hand or fingers. When assembling or separating the unit, keep all children away and make sure your hands are clear of any pinch point.
- · Always choose the workout which best fits your physical strength and flexibility level. Know your limits and train within them.
- Do not wear loose clothing while using the STAMINA X AMRAP ROWER.
- Always wear proper footwear such as running, walking, or cross training shoes.
- · Be careful to maintain your balance while assembling, mounting, using and dismounting the STAMINA X AMRAP ROWER. Loss of balance may result in a fall or serious bodily injury.
- The STAMINA X AMRAP ROWER should not be used by persons weighing over 250 pounds.
- The STAMINA X AMRAP ROWER is for consumer use only. It is not for use in public or semipublic facilities.

EXTEND YOUR PARTS WARRANTY TO 180 DAYS FROM THE DATE OF PURCHASE. REGISTER YOUR PRODUCT.



NEED HELP? CONTACT US FIRST 1 (800) 375-7520

customer.care@staminaproducts.com

Hi! From all of us here at Stamina Products, thank you for your purchase. We know that you have big fitness goals in mind and we are here to help you along. Call us, email us, or send us a message on Facebook. Be sure to contact us if you have any questions on your new product. We look forward to hearing from you!

With your body in mind,

Stamina Customer Care

To enact your extended warranty and to help us better serve you, please **go online** and register your new product.

register.staminaproducts.com

It is quick and easy to register online, but if you're a little old school or just need a reason to raise that little flag on your mailbox, fill out the info on the last page of this manual and mail it in.



customer.care@staminaproducts.com www.staminaproducts.com



1 (800) 375-7520



FAX (417) 889-8064



MAIL Stamina Products, Inc. ATTN: Customer Care 2040 N Alliance Ave Springfield, MO 65803

BEFORE YOU BEGIN

Thank you for choosing the STAMINA X AMRAP ROWER. We take great pride in this quality product and hope it will provide many hours of quality exercise to make you feel better, look better, and enjoy life to its fullest.

It's a proven fact that a regular exercise program can improve your physical and mental health. Too often, our busy lifestyles limit our time and opportunity to exercise. The STAMINA X AMRAP ROWER provides a convenient and simple method to begin your journey of getting your body in shape and achieving a happier and healthier lifestyle.

Before reading further, please review the drawing below and familiarize yourself with the parts that are labeled. Locate the serial decal on the product and write the serial number on the cover of the manual in the space provided. See the next page for an image of the serial decal. Model number and serial number are required when


calling for assistance.

Read this manual carefully before using the STAMINA X AMRAP ROWER.

Providing you with a quality product is Stamina's top priority. However, sometimes there could be a missing or incorrectly sized part. If you have any questions or problems with the parts included with your STAMINA X AMRAP ROWER, please do not return the product. Contact us FIRST!

If a part is missing or defective, please contact Customer Care for assistance. Call us toll free at 1-800-375-7520 (in the U.S.) or live chat on staminaproducts.com. Our Customer Care Staff is available to assist you from 7:30 A.M. to 5:00 P.M. (Central Time) Monday through Thursday and 8:00 A.M. to 3:00 P.M. (Central Time) on Friday.

Be sure to have the name and model number of the product available when you contact us.

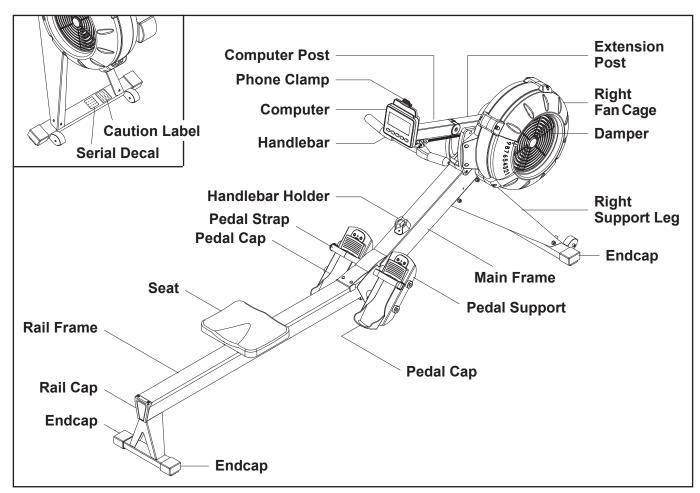

THE FOLLOWING TOOLS ARE INCLUDED FOR ASSEMBLY:



EQUIPMENT WARNING, CAUTION & NOTICE LABELS

This chart is provided to help identify the warning, caution, and notice labels on the STAMINA X AMRAP ROWER. Please take a moment to familiarize yourself with all of the warning, caution, and notice labels.

CAUTION LABEL(115)

ACAUTION

For consumer use only. Failure to follow all warnings and instructions could result in injury or property damage. Before assembling or using this product, read and follow the Owner's Manual and all other warnings and instructions that accompany this product. Replace this caution label if damaged, illegible, or removed.

Keep others including children & pets away from equipment when in use.

Consult your physician before starting this or any exercise program. This is especially important if you are over the age of 35 or have any pre-existing health condition. Always make sure all nuts and bolts are securely tightened before using this product. This product should not be used by person weighing more than 250 lbs. unless otherwise stated in your Owner's Manual.


SERIAL DECAL(129)



To best serve you, our Customer Care Representatives will need your serial number. For quick access, write in your serial number on the cover of the manual.

HARDWARE IDENTIFICATION CHART

This chart is provided to help identify the fasteners used in the assembly process. Place the washers or the ends of the bolts or screws on the circles to check for the correct diameter. Use the small scale to check the length of the bolts and screws.

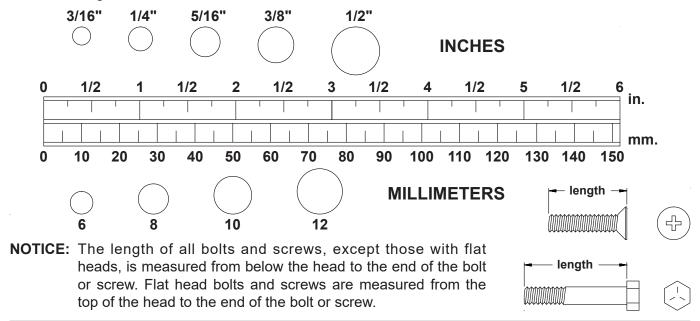

After unpacking the unit, open the hardware bag and make sure that you have all the following fasteners. Some fasteners may be already attached to the parts.

Part Number and Description			
78	Bolt, Button Head (M8 x 1.25 x 75mm)	1	
79	Washer (M8)	9	
80	Nylock Nut (M8 x 1.25)	1	
81 173	Bolt, Socket Head (M8 x 1.25 x 12mm) Bolt, Socket Head (M8 x 1.25 x 20mm)	8 4	
141	Bolt, Round Head (M6 x 1 x 12mm)	2	

Place all parts from the box in a cleared area and position them on the floor in front of you. Remove all packing materials from your area and place them back into the box. Do not dispose of the packing materials until assembly is completed. Read each step carefully before beginning. If you are missing a part, please go to staminaproducts.com under the Customer Care section and order the part needed, e-mail us at customer.care@staminaproducts.com, or call us toll free at 1-800-375-7520 (in the U.S.). Our Customer Care Staff is available to assist you from 7:30 A.M. to 5:00 P.M. (Central Time) Monday through Thursday and 8:00 A.M. to 3:00 P.M. (Central Time) on Friday.


Some product parts are fit tested at the factory to ensure proper fit and alignment. Marks in the paint may be noticeable, but are not an indication of damage.

STEP 1

Refer to illustration 1. Turn the main assembly of the STAMINA X AMRAP ROWER upside down and place it in the packing material styrofoam(A) and (B) to avoid breaking the chain covers. Attach the LEFT and RIGHT SUPPORT LEGS(7, 8) to the MAIN FRAME(175) with SOCKET HEAD BOLTS(M8x1.25x12mm) (81) and WASHERS(M8)(79). Do not tighten all bolts until Step 2.

STEP 2

Refer to illustration 2. Attach the FRONT STABILIZER(4) to the LEFT and RIGHT SUPPORT LEGS (7, 8) with SOCKET HEAD BOLTS(M8x1.25x12mm)(81) and WASHERS(M8)(79). Then tighten all bolts. Turn the assembly over.

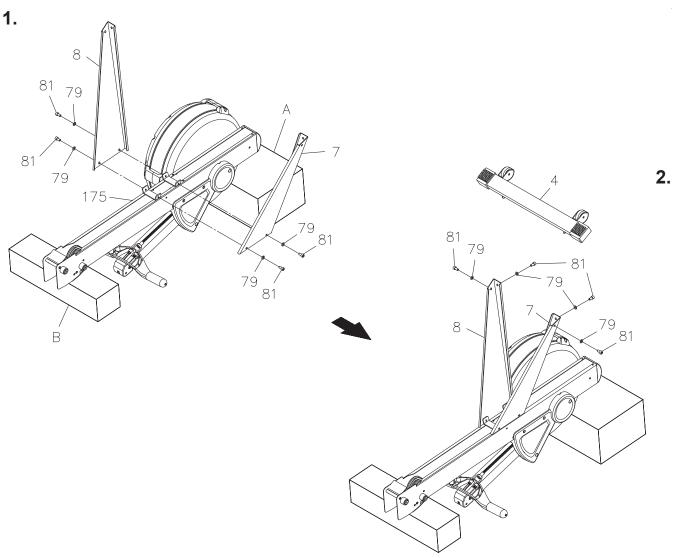


STEP 3

NOTE: You need to use two Allen Wrenches to tighten the SOCKET HEAD BOLTS(M8x1.25x20mm)(173) at both ends of the PEDAL SHAFTS(149, 150) at the same time.

There is an "L" decal on the left PEDAL CAP(45L), and an "R" decal on the right PEDAL CAP(45R). Insert the LARGE PEDAL SHAFT(149) through the upper hole located on the MAIN FRAME(175). Place the left PEDAL CAP(45L) onto left end, and place the right PEDAL CAP(45R) onto right end of the LARGE PEDAL SHAFT(149), slide them toward the MAIN FRAME(175). Then secure the PEDAL CAPS(45L, 45R) with SOCKET HEAD BOLTS(M8x1.25x20mm)(173) and SECURING CAPS(178) at both ends of the LARGE PEDAL SHAFT(149).

Insert the PEDAL SHAFT(150) through the holes on the PEDAL CAPS(45L, 45R) and the MAIN FRAME(175). Then secure the PEDAL CAPS(45L, 45R) with SOCKET HEAD BOLTS(M8x1.25x20mm) (173) and SECURING CAPS(178) at both ends of the PEDAL SHAFT(150).

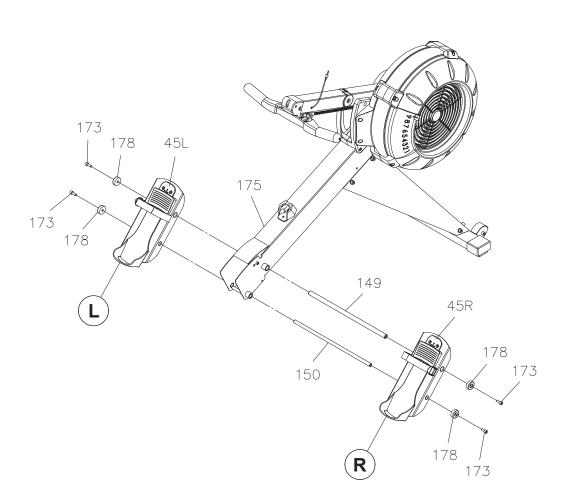


STEP 4

Refer to illustration 3. Lift up the MAIN FRAME(175) and RAIL FRAME(176) to insert the RAIL FRAME(176) into the MAIN FRAME(175). Make the PEDAL SHAFT(150) on the MAIN FRAME(175) fit into the gap in the RAIL FRAME(176). Then put the MAIN FRAME(175) and RAIL FRAME(176) down. Refer to illustration 4. Lock the MAIN FRAME(175) and RAIL FRAME(176) together with the PULL PIN(98).


STEP 5

Refer to illustration 4. Swing up the **COMPUTER POST(144)** and **EXTENSION POST(145)** assembly. Attach the **EXTENSION POST(145)** to the **LEFT** and **RIGHT COVERS(57, 58)** with **ROUND HEAD BOLTS (M6x1x12mm)(141)**.

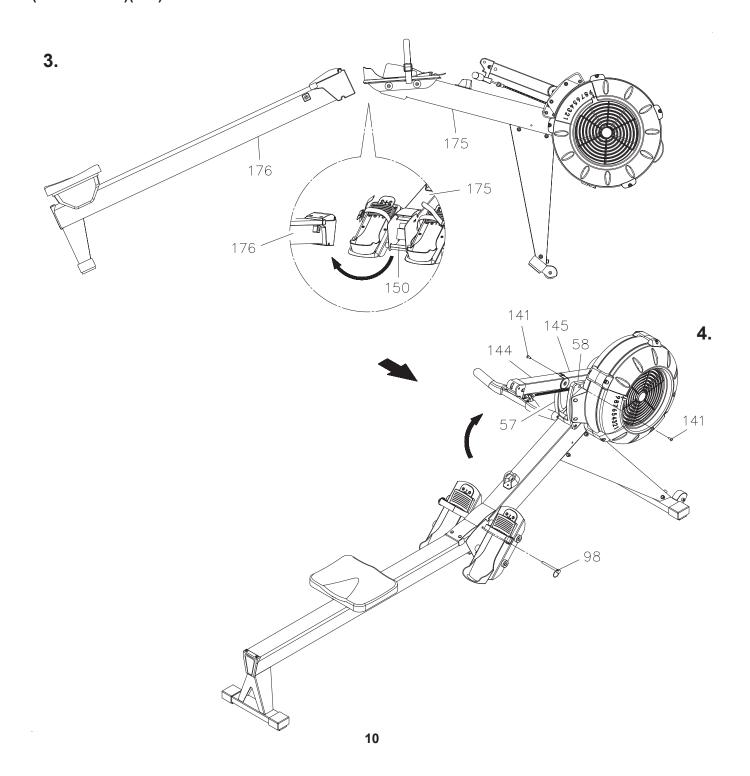

STEP 6

Install two size C batteries into the COMPUTER(143), the batteries are not included. See page 19 for detailed battery installation instructions. Attach the COMPUTER(143) to the COMPUTER POST(144) with BUTTON HEAD BOLT(M8x1.25x75mm)(78), WASHER(M8)(79), and NYLOCK NUT(M8x1.25)(80). Plug the SENSOR WIRE(23) into the back of the COMPUTER(143).

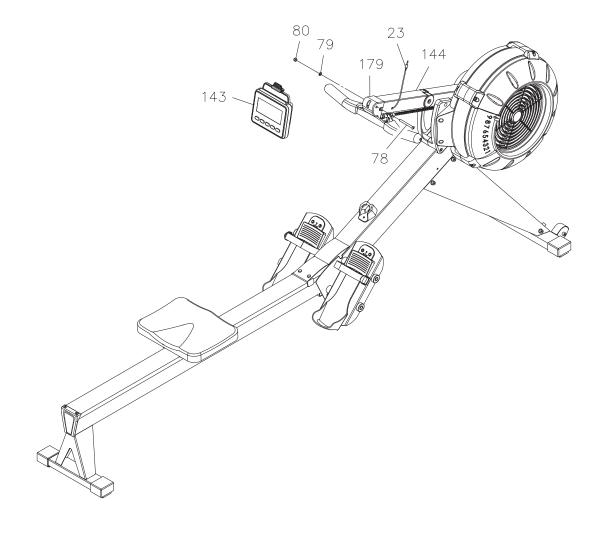

HEART RATE TRANSMITTER

The STAMINA X AMRAP ROWER can measure how hard you are exercising by monitoring your heart rate with the **HEART RATE TRANSMITTER(116)**. Your heart rate reading gives you a snapshot of how hard your heart is working at that point in your workout by measuring the number of heart beats per minute.


The **HEART RATE TRANSMITTER(116)** worn around your chest sends your heart rate information to a receiver inside the **COMPUTER(143)** so your heart rate is tracked while you exercise. This is the most reliable way to measure your heart rate to make sure you are exercising within your target heart rate zone so you get the most out of your workout time.

Using the Heart Rate Transmitter Chest Strap


The HEART RATE TRANSMITTER(116) worn around the chest is powered by a BUTTON BATTERY (CR2032)(120) located in the back of the HEART RATE TRANSMITTER(116). Two electrodes on the ELASTIC SENSOR STRAP(117) monitor your heartbeat, and the adjustable ELASTIC SENSOR STRAP(117) holds the transmitter in place. The receiver built into the COMPUTER(143) picks up your heart rate from the HEART RATE TRANSMITTER(116) and displays it on the monitor during your workout.

To assemble the HEART RATE TRANSMITTER(116), insert the BUTTON BATTERY(CR2032)(120) as shown in the illustration. Place the BATTERY RUBBER RING(118) on the edge of the opening and place the BATTERY COVER(119) over the BUTTON BATTERY(CR2032)(120). Using a coin or similar object, press down on the BATTERY COVER(119) and turn to securely close the cover.


- NOTE: 1. Make sure to close the BATTERY COVER (119) very tightly as illustrated to prevent sweat and moisture from damaging the battery.
 - 2. The **HEART RATE TRANSMITTER(116)** is latex free and its material is appropriate for human contact.

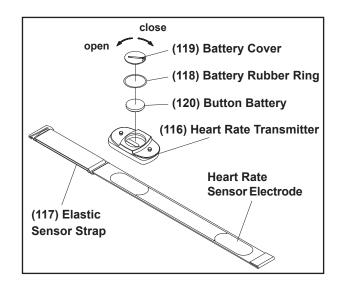

Refer to the illustration. Press the **HEART RATE TRANSMITTER(116)** onto the buttons on the **ELASTIC SENSOR STRAP(117)**.

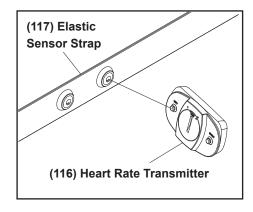

To wear the **HEART RATE TRANSMITTER(116)** around the chest, hook the hook end of the **ELASTIC SENSOR STRAP(117)** to the other end of the **ELASTIC SENSOR STRAP(117)**. Adjust the **ELASTIC SENSOR STRAP(117)** to fit your chest snugly as shown in the illustration below. Apply water or conductive gel to moisten the heart rate sensor electrodes. These heart rate sensor electrodes must be wet and in contact with your chest skin to properly detect your heart rate.

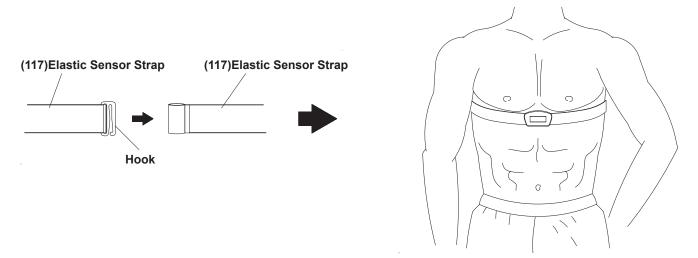

NOTE: If your heart rate is inconsistent or not tracking on your workout monitor, do the following:

- The **HEART RATE TRANSMITTER(116)** will connect to the computer while using the unit and within close proximity of the unit. If you are too far from the unit the connection will be lost.
- Moisten the heart rate sensor electrodes on the back of the ELASTIC SENSOR STRAP(117)
 and make sure they are in contact with the skin. Your skin may be dry when you begin your
 workout and the moisture is necessary to ensure contact. As you sweat, contact will improve.
- Tighten the elastic strap so it remains in place as you exercise. Movement of the heart rate sensor electrodes will result in inaccurate or erratic signal and readings.
- Clean the heart rate sensor electrodes as dirt can interfere with transmission. Use a mild soap and water and dry with a soft towel.

Transmitter Care and Maintenance

- Wash regularly with mild soap and water solution and dry with a soft towel being careful not to scratch the heart rate sensor electrodes.
- Store in a cool, dry place. Make sure the heart rate sensor electrodes aren't stored with any wet material and never store a wet transmitter in non-breathable material like a plastic bag or sports bag.
- Do not stretch the heart rate sensor electrodes.

NOTE: The frequency of the receiver built into the STAMINA | X AMRAP ROWER is 5 kHz. All compatible heart rate transmitters from other companies will work with the STAMINA | X AMRAP ROWER.

OPERATIONAL INSTRUCTIONS


müüv CONNECTION OPERATION

NOTE:

- 1. To fully operate your STAMINA XAMRAP ROWER you will need to download the free müüv app.
- 2. You will need to enable bluetooth in your phone settings first.




Power on the computer on your STAMINA XAMRAP ROWER. Open the müüv app and follow the following process to connect the rower to the müüv app. It will make your STAMINA XAMRAP ROWER work with the müüv application and many others. For more details and information, go visit https://müüv.fit.






Tap on ALL SETTINGS.

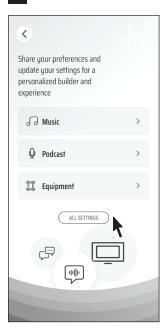

Tap on Connected Devices.

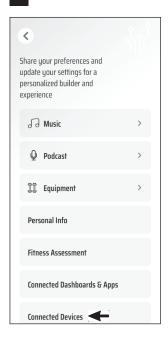


Tap on Connect next to the "SERU-xxxxxx" to connect.



NOTE: Under low battery conditions, the **COMPUTER(143)** may still work, but may make the müüv app unable to find the bluetooth device to connect. Please pay attention to the issue and replace the battery promptly.

Your STAMINA X AMRAP ROWER utilizes an air fan system to create resistance for your workout. We recommend that you use this computer console to vary your workout from session to session and note your progress toward your fitness goals. When used regularly in this way, the computer console can become an important source of motivation and interest which will help keep you on track.

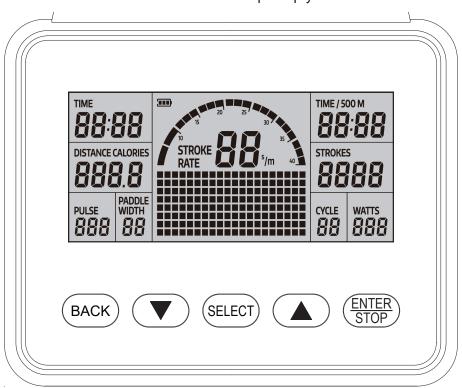

POWER ON: Move the handlebar or press any button.

POWER OFF: In IDLE mode, automatically shuts off after one minute of inactivity. During workout, automatically shuts off after two minutes of inactivity.

FUNCTION BUTTONS:

SELECT: In IDLE mode, press and release **SELECT** to cycle through each program option. Stop on the program of your choosing. You can preset target values for DISTANCE, TIME, and CALORIES, play the GAME, or select an Interval Program of 20/10, 10/20, or 10/10. During exercise, press the button to switch between displaying DISTANCE and CALORIES.


▲ (UP): Press to increase the preset values. Press the button and hold it down, the presetting value will go faster, release the button to stop.

▼ (DOWN): Press to decrease the preset values. Press the button and hold it down, the presetting value will go faster, release the button to stop.

BACK: When selecting the programs, press the button to return to the previous program. When you finish a running program, press the button to jump into the IDLE mode.

ENTER/STOP: When selecting the programs and presetting target values, press the button to confirm. Press the button and hold it down for three seconds to reset all functions to zero and restart the computer.

During exercise, when back light is turned off, the first pressing of this button will turn on the back light. When the back light is still lit, press the button a second time to pause the counting of all function values. Press the button a third time to restart the workout and continue the counting of all function values.

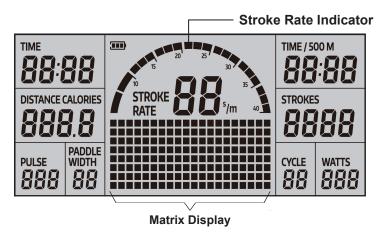

LCD DISPLAY INSTRUCTIONS

STROKE RATE: Displays the current strokes per minute during exercise, from zero to 9999 strokes per

minute.

NOTE: The STROKE RATE INDICATOR will display the same number as the STROKE

RATE showed.

TIME: Displays flashing "00:00" for presetting the time for preset TIME Program, from 1:00 to

99:00 minutes, and counts down from the preset value.

Displays the time during exercise, from 1 second up to 99:59 minutes.

TIME / 500M: During exercise, displays the estimated time for traveling the distance 500 meters

according to your current rowing speed, from 1 second up to 99:59 minutes.

DISTANCE /

Displays flashing "500" for presetting the distance for preset DISTANCE Program, from **CALORIES:** 100 to 9999 meters, and counts down from the preset value.

Displays the distance you are traveling during exercise, from 1 meter up to 9999 meters. For preset CALORIES Program, the matrix display will show a flashing "100" for presetting

the target calorie value, from 10 to 999 Kcals.

Displays the calories burned from zero up to 999 Kcals. The calories readout is an estimate for an average user. It should be used only as a comparison between workouts on this unit. **NOTE:** The display will switch to show DISTANCE and CALORIES every five seconds.

STROKES: Displays the number of strokes you have taken, from zero to 9999 strokes.

PULSE: Displays the heart rate, from 40 to 220 beats per minute during exercise.

To use this function, you must wear the **HEART RATE TRANSMITTER(116)** around your chest so the receiver, which is built into the computer, registers your heart rate from the **HEART RATE TRANSMITTER(116)** for display. If you do not wear the **HEART RATE** TRANSMITTER(116) around your chest correctly the display window will be empty.

NOTE: The HEART RATE TRANSMITTER(116) is not a medical device. Maintaining a consistent signal can be difficult due to the varying distances experienced during the rowing stroke. The heart rate function is a great tool to optimize your workout, but should

be used as a reference only.

PADDLE WIDTH: Displays the traveling distance of eack stroke, from zero to 999 meters.

CYCLE: When an Interval Program is selected, 20/10, 10/20, and 10/10, displays a flashing "8" for

presetting the value of how many cycles you want to exercise, from 1 to 99, the readout


of the CYCLE will count down from the preset value when exercising.

WATTS: Displays the amount of power being exerted from zero to 999 watts.

PROGRAM DESCRIPTIONS


This computer contains the programs, Normal Program, Distance, Time, Calories, Game, 20/10 Interval Program, 10/20 Interval Program, and 10/10 User Setting Interval Program. Refer to the following for the operation of these programs.

1. NORMAL PROGRAM:




You can pull on the **HANDLEBAR(139)** to power on the computer and exercise with this program directly. All function values will count up, and the matrix display will show the wave profiles according to your rowing speed. Refer to the following.


NOTE: This is the only program you can run with the built in generator when the batteries are dead or not installed.



The small waves display the low rowing speed.



The medium waves display the medium rowing speed.



The big waves display the high rowing speed.


For the preset function value programs, press the **BACK** button to enter IDLE mode. Or, press the **ENTER/STOP** button and hold it down for three seconds to restart the computer. The computer will go through the programs as follows and allow you to set the target value for the selected program. Use **SELECT** button to select the program for DISTANCE, TIME, or CALORIES. You can only preset one function value for each selected program. Use "▲/▼" buttons to input the value, and press **ENTER/STOP** button to confirm. After the desired setting is chosen, begin pulling on the **HANDLEBAR(3)** to start the workout.

Distance (100 to 9999 meters) → Time (1:00 to 99:00) → Calories (10 to 999 Kcals) → Game
→ 20/10 Interval Program → 10/20 Interval Program → 10/10 User Setting Interval Program

- 2. DISTANCE PROGRAM: During exercise, the DISTANCE will count down from preset value, all other functions will count up. The matrix display will show the estimated time for traveling the distance 500 meters according to your current rowing speed. When you complete the DISTANCE PROGRAM, the computer will show "WINNER" and remind you with an audible alarm. Press the BACK button to jump to the IDLE mode.
- **3. TIME PROGRAM:** During exercise, the TIME will count down from preset value, all other functions will count up. The matrix display will show the wave profiles according to your rowing speed. Refer to the above. When you complete the TIME PROGRAM, the computer will remind you with an audible alarm. Press the **BACK** button to jump to the IDLE mode.
- 4. CALORIES PROGRAM: Use SELECT button to select this program. The matrix display will display flashing "100" for presetting the target calorie value, from 10 to 999 Kcals. Use "▲/▼" buttons to input the value, and press ENTER/STOP button to confirm. Pull on the HANDLEBAR(139) to start the workout. During exercise, the matrix display will count down from preset calorie value, all other function values will count up, including the CALORIES readout at the left display window. When you complete the CALORIES PROGRAM, the computer will show "END" and remind you with an audible alarm. Press the BACK button to jump to the IDLE mode.


NOTE: To exercise with the following programs, you will not be able to preset the function values. Refer to the following for the operation of these programs.

5. GAME PROGRAM:




We call this program Score Game, use **SELECT** button to select the program. The fixed preset TIME for the game is 5 minuets, this can't be changed. Pull on the **HANDLEBAR(139)** to run the program directly. When you complete the program, the matrix display will show your point score and remind you with an audible alarm. Press the **BACK** button to jump to the IDLE mode.

Hit the four square block, lose three points.

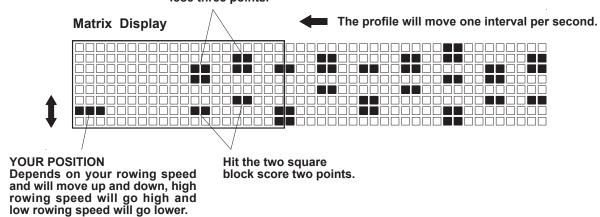


6. 20/10 INTERVAL PROGRAM:



This program will allow the user to workout for 20 seconds, then rest for 10 seconds, and will cycle this way.

Use **SELECT** button to select this program. The computer will display flashing "8" for presetting the value of how many intervals you want to exercise, from 1 to 99. Use "▲/▼" buttons to input the value, and press **ENTER/STOP** button to confirm. Pull on the **HANDLEBAR(139)** to start to workout. The readout of the CYCLE will count down from the preset value, all other function values will count up. When you complete the program, the computer will remind you with an audible alarm. Press the **BACK** button to jump to the IDLE mode.


7. 10/20 INTERVAL PROGRAM:



This program will allow the user to workout for 10 seconds, then rest for 20 seconds, and will cycle this way.

Use **SELECT** button to select this program. The computer will display flashing "8" for presetting the value of how many intervals you want to exercise, from 1 to 99. Use "▲/▼" buttons to input the value, and press **ENTER/STOP** button to confirm. Pull on the **HANDLEBAR(139)** to start to workout. The readout of the CYCLE will count down from the preset value, all other function values will count up. When you complete the program, the computer will remind you with an audible alarm. Press the **BACK** button to jump to the IDLE mode.

8. 10/10 USER SETTING INTERVAL PROGRAM:




This program will allow the user to manually preset the workout time and rest time from 10 to 99 seconds. The user will exercise for the preset workout time, then rest for the preset rest time, and will cycle this way. Use **SELECT** button to select this program. Use " ▲/▼" and **ENTER/STOP** buttons to input the values of how many intervals you want to exercise, workout time, and rest time. Pull on

the **HANDLEBAR(139)** to start to workout. The readout of the INTERVAL will count down from the preset value, all other function values will count up. When you complete the program, the computer will remind you with an audible alarm. Press the **BACK** button to jump to the IDLE mode.

When working out with an Interval Program, 20/10, 10/20, and 10/10, the matrix display will show the information as following.


Matrix display for the workout time



Workout time counts down here.

Wave profile depends on your rowing speed.

Matrix display for the rest time



Rest time counts down here.

Pause symbol for the rest time.

When you complete running an Interval Program, if you continue rowing, the Interval Program will repeat and continue to run.

OPERATION DESCRIPTIONS


- 1. The back light of the LCD display will stay on for 10 seconds after the last pressing of any button, then it will turn off. You can press any button to turn it on again.
- 2. To stop a running program, press the **ENTER/STOP** button. During exercise, when back light is turned off, the first pressing of this button will turn on the back light. When the back light is still lit, press the button a second time to pause the counting of all function values. Press the button a third time to restart the workout and continue the counting of all function values.
- 3. If you want to restart with a new program, press and hold the **ENTER/STOP** button down for three seconds to reset all of the function values to zero and restart the computer. Use **SELECT** button to select a new program.

HOW TO INSTALL AND REPLACE BATTERIES:

- 1. Open the Battery Door on the back of the **COMPUTER(143).**
- 2. The **COMPUTER(143)** operates with two C batteries (1.5V each), the batteries are not included. Refer to the illustration to install or replace the batteries.

NOTE: 1. Do not mix a new battery with an old battery.


- 2. Use the same type of battery. Do not mix an alkaline battery with another type of battery.
- 3. Rechargeable batteries are not recommended.
- 4. Ultimate disposal of battery should be handled according to all state and federal laws and regulations.
- 5. Do not dispose of batteries in fire.



OPERATIONAL INSTRUCTIONS


LOAD ADJUSTMENT


There is a **DAMPER(42)** built into the **RIGHT FAN CAGE(43)**. Move the Indicator in the **DAMPER(42)** to point to the numbers on the **RIGHT FAN CAGE(43)** to adjust the load. There are settings from 1 to 9. Setting #1 will provide the lowest resistance. Setting #9 will provide the highest resistance.

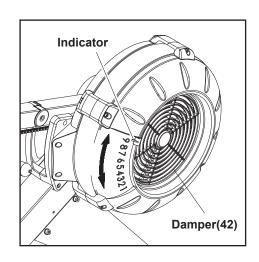

HANDLEBAR POSITION

The **HANDLEBAR(139)** can be placed on the hook in the **COMPUTER POST(144)**, refer to illustration A. Or, you can place the **HANDLEBAR(139)** on the **HANDLEBAR HOLDER(52)** as shown in illustration B.

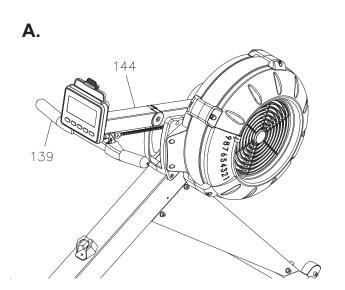


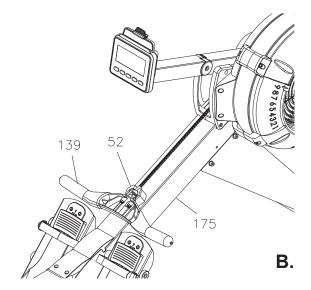

PEDAL CAP ADJUSTMENT

The position of the **PEDAL CAPS(45)** can be adjusted. Refer to the illustration. Pull the **PEDAL CAP(45)** out from the two bulges in the **PEDAL SUPPORT(177)**, then lower or raise the **PEDAL CAPS(45)** to the desired position. Lock the **PEDAL CAPS(45)** in position by pressing the adjustment holes of the desired position onto the two bulges.


Refer to the numbers on the **PEDAL CAPS(45)** to make sure that **PEDAL CAPS(45)** are adjusted on the same position on both sides.

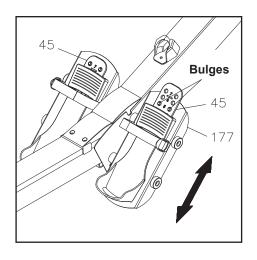

OPERATIONAL INSTRUCTIONS


COMPUTER POSITION ADJUSTMENT

To adjust, hold on both sides of the **COMPUTER(143)** and move the computer up or down by swinging the **COMPUTER POST(144)** up or down. Rotate the COMPUTER(143) forward or backward to adjust its angle.

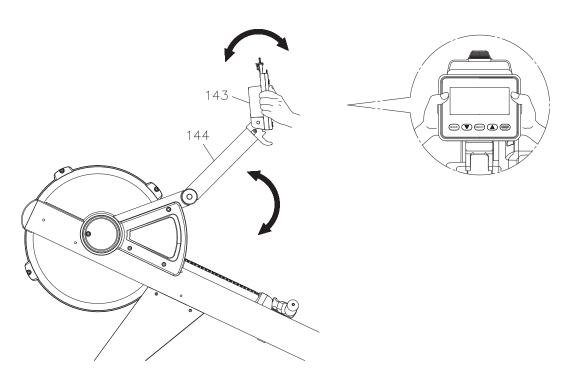


USING THE PHONE CLAMP

Pull up the **PHONE CLAMP(156)**, then slide the Cell Phone into the gap between the **PHONE CLAMP(156)** and the **COMPUTER(143)**. Move the **PHONE CLAMP(156)** downward to secure the Cell Phone in position.

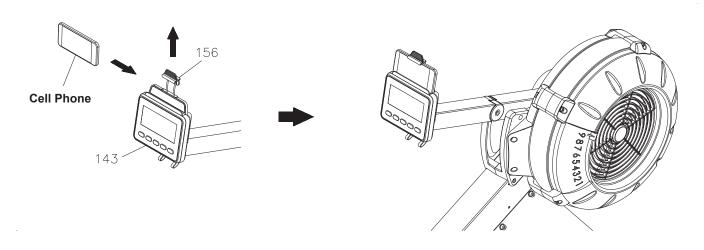

STORAGE

- To store the STAMINA X AMRAP ROWER, simply keep it in a clean dry place.
- To avoid damage to the electronics, remove the batteries from the COMPUTER(143) before storing the STAMINA X AMRAP ROWER for one year or more.
- Move the STAMINA X AMRAP ROWER with the MOVING WHEELS(66) on the FRONT STABILIZER (4). Lift the Rear Stand of the RAIL FRAME(176) to move the STAMINA X AMRAP ROWER. Refer to the illustration below. Do not use the SEAT(51) to move the STAMINA X AMRAP ROWER. The SEAT(51) will move and the SEAT CARRIAGE(10) may pinch your hand or fingers.

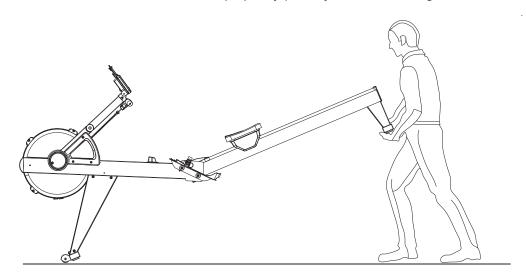

The MAIN FRAME(175) and the RAIL FRAME(176) can be separated to minimize the unit size for storage. Remove the PULL PIN(98) from the MAIN FRAME(175). Lift up the MAIN FRAME(175) and pull out the RAIL FRAME(176) to separate. Insert the PULL PIN(98) back into the hole in the MAIN FRAME(175) for storage.

176


MAINTENANCE

The safety and integrity designed into the STAMINA X AMRAP ROWER can only be maintained when the STAMINA X AMRAP ROWER is regularly examined for damage and wear. Special attention should be given to the following:

- Pull on the **HANDLEBAR(139)** and verify that the Magnetic System provides tension and the seat travel is smooth and stable.
- Clean the roller tracks in the RAIL(14) with an absorbent cloth.
- Verify that all nuts and bolts are present and properly tightened. Replace missing nuts and bolts. Tighten loose nuts and bolts.
- Check the condition of the CHAIN(36). Replace the CHAIN(36) if it is cracked or broken.
- Verify that the **CAUTION LABEL(115)** is in place and easy to read. Call Stamina Products immediately at 1-800-375-7520 for a replacement **CAUTION LABEL(115)** if it is missing or damaged.
- It is the sole responsibility of the user/owner to ensure that regular maintenance is performed.
- Worn or damaged components must be replaced immediately or the STAMINA X AMRAP ROWER removed from service until repair is made.
- Only Stamina Products supplied components should be used to maintain/repair the STAMINA X AMRAP ROWER.
- Keep your STAMINA X AMRAP ROWER clean by wiping it off with an absorbent cloth after use.

COMPUTER POST ADJUSTMENT

Over time the COMPUTER POST(144) may loosen. You can use the ALLEN WRENCH(5mm) to tighten the SOCKET HEAD BOLT(M6x1x16mm)(99) which is located on the inside of the COMPUTER POST(144). The COMPUTER POST(144) must be able to rotate, do not overtighten the bolt.

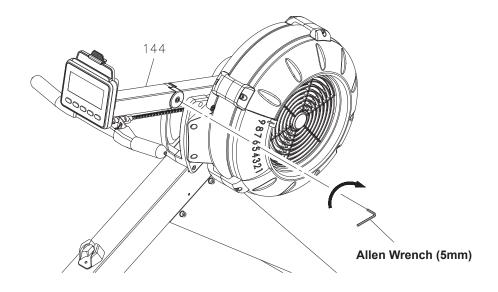


MAINTENANCE

BUNGEE CORD ADJUSTMENT


Over time, about 250,000 strokes on **HANDLEBAR(3)**, your **BUNGEE CORD(38)** may stretch. Follow the following process to adjust:

 Position the MAIN FRAME ASSEMBLY(175) as shown in the illustration. Remove the MAIN FRAME CAP(68) from the MAIN FRAME(175). Slide out the BOTTOM COVER(70) from the MAIN FRAME(175).

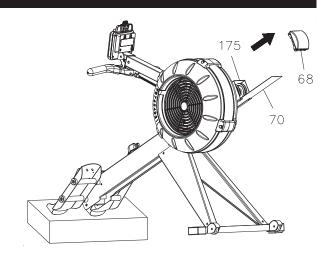


2. Position the MAIN FRAME ASSEMBLY(175) as shown in the below illustration. Unhook the LEFT BUNGEE CORD HOOK(12L) from the MAIN FRAME(175). Make a mark on the BUNGEE CORD(38) to move the hook forward 2 inches. Refer to View 1 to View 3 to untie the BUNGEE CORD(38) from the LEFT BUNGEE CORD HOOK(12L), and move the hook forward 2 inches. Refer to View 4 to View 6 to retie the BUNGEE CORD(38) to the LEFT BUNGEE CORD HOOK(12L). Hook the LEFT BUNGEE CORD HOOK(12L) back into the MAIN FRAME(175) and push the hook to the left side to touch the inner wall of the MAIN FRAME(175). CAUTION: Always use two hands with a secure grip when re-attaching the BUNGEE CORD HOOKS(12L & 12R).

Unhook the RIGHT BUNGEE CORD HOOK(12R) from the MAIN FRAME(175). Do the same as above to adjust the BUNGEE CORD(38) on the right side.

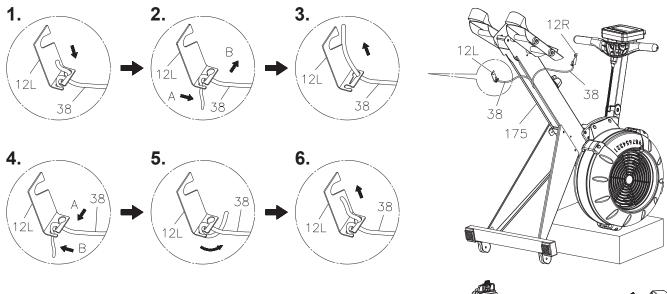

3. Position the MAIN FRAME ASSEMBLY(175) as shown in the illustration. Slide the BOTTOM COVER(70) back into the MAIN FRAME(175). Press the MAIN FRAME CAP(68) into the MAIN FRAME(175).

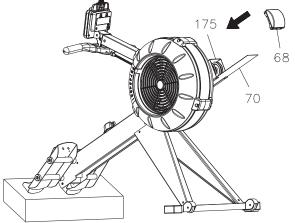

CONDITIONING GUIDELINES

How you begin your exercise program depends on your physical condition. If you have been inactive for several years or are severely overweight, start slowly and increase your workout time gradually. Increase your workout intensity gradually by monitoring your heart rate while you exercise.


Remember to follow these essentials:

- Have your doctor review your training and diet programs.
- Begin your training program slowly with realistic goals that have been set by you and your physician.
- Warm up before you exercise and cool down after you work out.
- Take your pulse periodically during your workout and strive to stay within a range of 60% (lower intensity) to 90% (higher intensity) of your maximum heart rate zone. Start at the lower intensity, and build up to higher intensity as you become more aerobically fit.
- If you feel dizzy or lightheaded you should slow down or stop exercising.

Initially you may only be able to exercise within your target zone for a few minutes; however, your aerobic capacity will improve over the next six to eight weeks. It is important to pace yourself while you exercise so you don't tire too quickly.

To determine if you are working out at the correct intensity, use a heart rate monitor or use the table below. For effective aerobic exercise, your heart rate should be maintained at a level between 60% and 90% of your maximum heart rate. If just starting an exercise program, work out at the low end of your target heart rate zone. As your aerobic capacity improves, gradually increase the intensity of your workout by increasing your heart rate.

Measure your heart rate periodically during your workout by stopping the exercise but continuing to move your legs or walk around. Place two or three fingers on your wrist and take a six second heartbeat count. Multiply the results by ten to find your heart rate. For example, if your six second heartbeat count is 14, your heart rate is 140 beats per minute. A six second count is used because your heart rate will drop rapidly when you stop exercising. Adjust the intensity of your exercise until your heart rate is at the proper level.



Target Heart Rate Zone Estimated by Age*

Age	Target Heart Rate Zone (55%-90% of Maximum Heart Rate)	Average Maximum Heart Rate 100%
20 years	110-180 beats per minute	200 beats per minute
25 years	107-175 beats per minute	195 beats per minute
30 years	105-171 beats per minute	190 beats per minute
35 years	102-166 beats per minute	185 beats per minute
40 years	99-162 beats per minute	180 beats per minute
45 years	97-157 beats per minute	175 beats per minute
50 years	94-153 beats per minute	170 beats per minute
55 years	91-148 beats per minute	165 beats per minute
60 years	88-144 beats per minute	160 beats per minute
65 years	85-139 beats per minute	155 beats per minute
70 years	83-135 beats per minute	150 beats per minute

^{*} For cardiorespiratory training benefits, the American College of Sports Medicine recommends working out within a heart rate range of 55% to 90% of maximum heart rate. To predict the maximum heart rate, the following formula was used: 220 - Age = predicted maximum heart rate

WARM-UP and COOL-DOWN

Warm-Up The purpose of warming up is to prepare your body for exercise and to minimize injuries. Warm up for two to five minutes before strength training or aerobic exercising. Perform activities that raise your heart rate and warm the working muscles. Activities may include brisk walking, jogging, jumping jacks, jump rope, and running in place.

Cool-Down The purpose of cooling down is to return the body to its normal, or near normal, resting state at the end of each exercise session. A proper cool-down slowly lowers your heart rate and allows blood to return to the heart. Your cool down should be completed after each strength training session.

MODEL 35-1423D

WARRANTY

Stamina Products, Inc. ("Stamina") warrants to the original purchaser that this product will be free from defects in materials and workmanship that arise under normal use, service, proper assembly and proper operation in accordance with product warnings/instructions for a period of 90 days on the parts and three years on the frame from the date of the original purchase from an authorized retailer. THIS WARRANTY SHALL NOT APPLY TO ANY PRODUCT WHICH HAS BEEN SUBJECT TO COMMERCIAL USE, ABUSE, MISUSE, ALTERATION OF ANY KIND OR TO ANY DEFECT OR CHANGE CAUSED BY IMPROPER ASSEMBLY, REPAIR, REPLACEMENT, SUBSTITUTION OR USE WITH PARTS NOT PROVIDED BY STAMINA. Commercial use includes use of product in athletic clubs, health clubs, spas, gyms, and all other public or semipublic facilities whether or not the product's use is in furtherance of a profit making enterprise, and all other use which is not for personal purposes.

To implement this limited warranty, send a written notice stating your name, date, and place of purchase and a brief description of the defect along with your receipt to Stamina Products, Inc. 2040 N Alliance Ave, Springfield, Missouri, USA, MO 65803, or email us at customer.care@staminaproducts.com, or call us at 1-800-375-7520. If the defect is covered under this limited warranty, you will be requested to return the product or part to us for free repair or replacement at our option.


NO ACTION FOR BREACH OF THIS LIMITED WARRANTY MAY BE COMMENCED MORE THAN ONE (1) YEAR AFTER THE DATE THE ALLEGED BREACH WAS OR SHOULD HAVE BEEN DISCOVERED. NO ACTION FOR BREACH OF ANY IMPLIED WARRANTY (INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE) MAY BE COMMENCED MORE THAN ONE (1) YEAR AFTER DELIVERY OF THE PRODUCT TO THE PURCHASER. These warranties are not transferable. IF ANY PART OF THE PRODUCT IS NOT IN COMPLIANCE WITH THIS LIMITED WARRANTY OR ANY IMPLIED WARRANTY, THE REMEDY OF REPAIR OR REPLACEMENT IS THE EXCLUSIVE REMEDY. If any claim is made under this limited warranty or any implied warranty, Stamina reserves the right to require the product to be returned for inspection, at the purchaser's expense, to Stamina's premises in Springfield, Missouri. Return of the enclosed warranty registration card is not required for warranty coverage, but is merely a way of establishing the date and place of purchase.

Stamina SHALL NOT BE LIABLE FOR THE LOSS OF USE OF ANY PRODUCT, LOSS OF TIME, INCONVENIENCE, COMMERCIAL LOSS OR ANY OTHER INDIRECT, CONSEQUENTIAL, SPECIAL OR INCIDENTAL DAMAGES DUE TO BREACH OF THE ABOVE WARRANTY OR ANY IMPLIED WARRANTY.

THIS LIMITED WARRANTY IS THE ONLY EXPRESS WARRANTY. NO ORAL OR WRITTEN INFORMATION GIVEN BY STAMINA, ITS AGENTS OR EMPLOYEES, SHALL CREATE A WARRANTY OR IN ANY WAY INCREASE THE SCOPE OF THIS WARRANTY. This warranty gives you specific legal rights, and you may also have other legal rights which vary from state to state. ANY OTHER RIGHT WHICH YOU MAY HAVE, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, IS LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY.

The laws in some states affect the disclaimer or limitation of implied warranties and consequential and incidental damages. If any such law is found applicable, the foregoing disclaimers and limitations of and on implied warranties and consequential and incidental damages shall be deemed to be modified to the extent necessary to comply with applicable law.

PRODUCT PARTS DRAWING

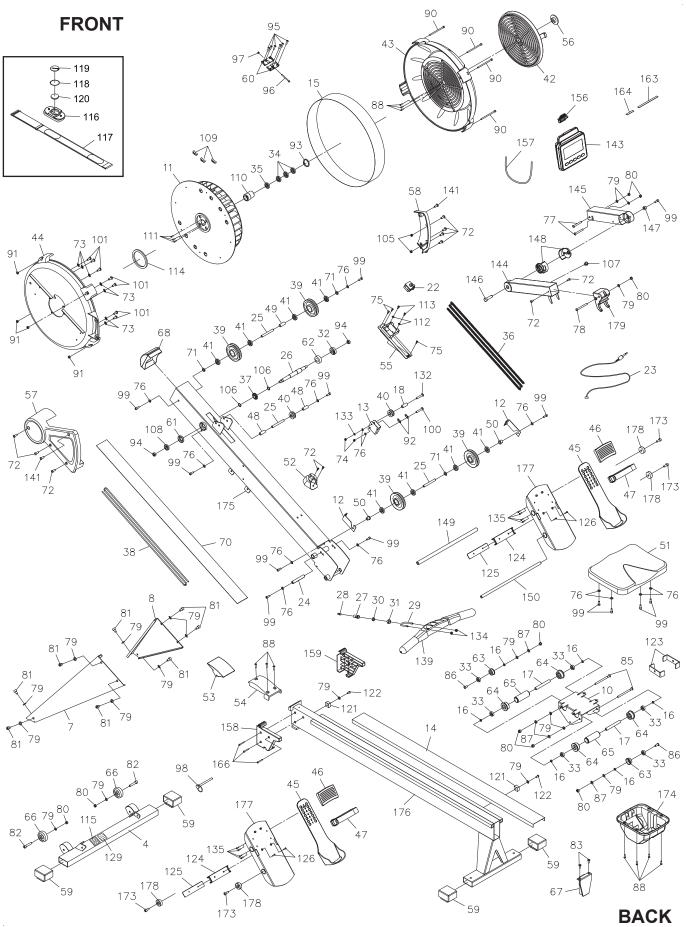

PARTS LIST

4 Front Stabilizer 7 Left Support Leg 8 Right Support Leg 10 Seat Carriage 11 Fan 11 Fan 12 Bungee Cord Hook 21 Chain Idler Bracket 13 Chain Idler Bracket 14 Rail 15 Outlet Perforation 16 Spacer (ø8.2 x ø12 x 3.2mm) 16 Spacer (ø8.2 x ø12 x 3.2mm) 17 Long Spacer (ø8.2 x ø12 x 71.6mm) 18 Chain Roller Spacer (ø6.2 x Ø10 x 15.5mm) 19 Generator 20 Generator 21 Sensor Wire 22 Generator 23 Sensor Wire 24 Shaft (M6 x 1, ø11.8 x 79.5mm) 25 Pulley Shaft (M6 x 1, ø10 x 76.5mm) 26 Fan Axle 27 Hook Connector 28 Chain Connector 29 U Bolt 30 Inner Spacer 31 Outer Collar 32 Bearing (6003RS) 33 Bearing (6003RS) 34 Bearing (6003RS) 35 One-way Bearing (HF2016) 36 Chain, (1/4* pitch) 37 Sprocket 38 Bungee Cord 40 Chain Roller 41 Bearing (6000ZZ) 48 Bungee Cord 49 Bungee Cord 40 Chain Roller 41 Bearing (6000ZZ) 42 Damper 43 Right Fan Cage 44 Left Fan Cage 44 Left Fan Cage 45 Pedal Strap 46 Toe Piece 47 Pedal Strap 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 50 Pulley Bushing 51 Seat 52 Handlebar Holder 53 Joint Cover 54 Fixed Joint Cover 55 Generator Base 56 Damper Securing Cap 57 Left Cover 57 Left Cover 58 Right Cover	PART#	PART NAME	QTY
8 Right Support Leg 1 10 Seat Carriage 1 11 Fan 1 12 Bungee Cord Hook 2 13 Chain Idler Bracket 1 14 Rail 1 15 Outlet Perforation 1 16 Spacer (ø8.2 x ø12 x 3.2mm) 6 17 Long Spacer (ø8.2 x ø12 x 3.2mm) 7 18 Chain Roller Spacer (ø6.2 x ø10 x 15.5mm) 1 22 Generator 1 23 Sensor Wire 1 24 Shaft (M6 x 1, ø11.8 x 79.5mm) 1 25 Pulley Shaft (M6 x 1, ø10 x 76.5mm) 1 26 Fan Axle 1 27 Hook Connector 1 28 Chain Connector 1 29 U Bolt 1 30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (6003RS) 1 34 Bearing (6003RS) 1 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1	4	Front Stabilizer	1
10 Seat Carriage 1 11 Fan 1 12 Bungee Cord Hook 2 13 Chain Idler Bracket 1 14 Rail 1 15 Outlet Perforation 1 16 Spacer (ø8.2 x ø12 x 3.2mm) 6 17 Long Spacer (ø8.2 x ø12 x 71.6mm) 2 18 Chain Roller Spacer (ø6.2 x ø10 x 15.5mm) 1 22 Generator 1 23 Sensor Wire 1 24 Shaft (M6 x 1, ø11.8 x 79.5mm) 1 25 Pulley Shaft (M6 x 1, ø10 x 76.5mm) 3 26 Fan Axle 1 27 Hook Connector 1 28 Chain Connector 1 29 U Bolt 1 30 Inner Spacer 0 11 Searing (6003RS) 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (6201RS) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1	7	Left Support Leg	1
11 Fan	8	Right Support Leg	1
12 Bungee Cord Hook 13 Chain Idler Bracket 14 Rail 14 Rail 15 Outlet Perforation 16 Spacer (ø8.2 x ø12 x 3.2mm) 17 Long Spacer (ø8.2 x ø12 x 71.6mm) 18 Chain Roller Spacer (ø6.2 x ø10 x 15.5mm) 19 Generator 10 Sensor Wire 11 Shaft (M6 x 1, ø11.8 x 79.5mm) 10 Sensor Wire 11 Shaft (M6 x 1, ø11.8 x 79.5mm) 10 Sensor Wire 11 Shaft (M6 x 1, ø10 x 76.5mm) 11 Sensor Wire 12 Sensor Wire 12 Sensor Wire 13 Sensor Wire 14 Shaft (M6 x 1, ø10 x 76.5mm) 15 Sensor Wire 16 Fan Axle 17 Hook Connector 18 Chain Connector 19 U Bolt 19 U Bolt 10 U Bolt 11 Outer Collar 11 Outer Collar 12 Bearing (6003RS) 11 Searing (6003RS) 12 Bearing (608ZZ) 13 Bearing (608ZZ) 14 Bearing (6001RS) 15 One-way Bearing (HF2016) 16 Chain, (1/4" pitch) 17 Sprocket 18 Bungee Cord 19 Bungee Cord Pulley 19 U Sharing (Boloozz) 10 Bearing (6000ZZ) 11 Bearing (6000ZZ) 12 Bearing (6000ZZ) 13 Bearing (6000ZZ) 14 Bearing (6000ZZ) 15 Bearing (6000ZZ) 16 Sensor Willer Spacer (Ø10 x Ø16 x 30.5mm) 17 Sprocket 18 Sensor (Ø10 x Ø16 x 26.5mm) 19 Pulley Bushing 10 Pulley Bushing 11 Seat 12 Handlebar Holder 15 Seat 15 Seat 16 Damper Securing Cap 16 Left Cover 17 Fixed Joint Cover 17 Fixed Joint Cover 18 Left Cover 19 Left Cover	10	Seat Carriage	1
13 Chain Idler Bracket 14 Rail 15 Outlet Perforation 16 Spacer (ø8.2 x ø12 x 3.2mm) 17 Long Spacer (ø8.2 x ø12 x 71.6mm) 2 Chain Roller Spacer (ø6.2 x ø10 x 15.5mm) 18 Chain Roller Spacer (ø6.2 x ø10 x 15.5mm) 19 Generator 20 Generator 21 Sensor Wire 22 Shaft (M6 x 1, ø11.8 x 79.5mm) 23 Sensor Wire 24 Shaft (M6 x 1, ø11.8 x 79.5mm) 25 Pulley Shaft (M6 x 1, ø10 x 76.5mm) 26 Fan Axle 27 Hook Connector 28 Chain Connector 29 U Bolt 30 Inner Spacer 31 Outer Collar 31 Outer Collar 32 Bearing (6003RS) 33 Bearing (6003RS) 34 Bearing (6008ZZ) 35 One-way Bearing (HF2016) 36 Chain, (1/4" pitch) 37 Sprocket 38 Bungee Cord 39 Bungee Cord 40 Chain Roller 41 Bearing (6000ZZ) 42 Damper 43 Right Fan Cage 44 Left Fan Cage 45 Pedal Cap 46 Toe Piece 47 Pedal Strap 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 49 Pulley Bushing 51 Seat 52 Handlebar Holder 53 Joint Cover 54 Fixed Joint Cover 55 Generator Base 1 Damper Securing Cap 1 Left Cover	11	Fan	1
14 Rail 15 Outlet Perforation 16 Spacer (ø8.2 x ø12 x 3.2mm) 17 Long Spacer (ø8.2 x ø12 x 71.6mm) 18 Chain Roller Spacer (ø6.2 x ø10 x 15.5mm) 19 Chain Roller Spacer (ø6.2 x ø10 x 15.5mm) 10 Chain Roller Spacer (ø6.2 x ø10 x 15.5mm) 11 Chain Roller Spacer (ø6.2 x ø10 x 15.5mm) 12 Generator 13 Sensor Wire 14 Shaft (M6 x 1, ø11.8 x 79.5mm) 15 Pulley Shaft (M6 x 1, ø10 x 76.5mm) 16 Fan Axle 17 Hook Connector 18 Chain Connector 19 U Bolt 10 U Bolt 11 Chain Connector 11 U Bolt 12 Bearing (6003RS) 13 Bearing (6003RS) 14 Bearing (6003RS) 15 One-way Bearing (HF2016) 16 Chain, (1/4" pitch) 17 Sprocket 18 Bearing (6000ZZ) 18 Bearing (6000ZZ) 19 Bearing (6000ZZ) 29 Bungee Cord Pulley 20 Chain Roller 21 Bearing (6000ZZ) 21 Bearing (6000ZZ) 22 Bearing (6000ZZ) 23 Bearing (6000ZZ) 24 Bearing (6000ZZ) 25 Bearing (6000ZZ) 26 Bearing (6000ZZ) 27 Bearing (6000ZZ) 28 Bearing (6000ZZ) 28 Bearing (6000ZZ) 29 Bearing (6000ZZ) 20 Bearing (6000ZZ) 21 Bearing (6000ZZ) 22 Bearing (6000ZZ) 23 Bearing (6000ZZ) 24 Bearing (6000ZZ) 25 Bearing Cord Pulley 26 Bearing (6000ZZ) 27 Bearing Cord Pulley 28 Bearing (6000ZZ) 29 Bearing Cap 20 Chain Roller Spacer (ø10 x ø16 x 30.5mm) 20 Pulley Bushing 21 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 22 Bearing Cover 23 Damper Securing Cap 24 Fixed Joint Cover 25 Generator Base 26 Damper Securing Cap 27 Left Cover	12	Bungee Cord Hook	2
15 Outlet Perforation 1 16 Spacer (ø8.2 x ø12 x 3.2mm) 6 17 Long Spacer (ø8.2 x ø12 x 71.6mm) 2 18 Chain Roller Spacer (ø6.2 x ø10 x 15.5mm) 1 22 Generator 1 23 Sensor Wire 1 24 Shaft (M6 x 1, ø11.8 x 79.5mm) 1 25 Pulley Shaft (M6 x 1, ø10 x 76.5mm) 3 26 Fan Axle 1 27 Hook Connector 1 28 Chain Connector 1 29 U Bolt 1 30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (6008ZZ) 6 34 Bearing (608ZZ) 6 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord 1 30 Bearing (6000ZZ) 8 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1	13	Chain Idler Bracket	1
16	14	Rail	1
17 Long Spacer (Ø8.2 x Ø12 x 71.6mm) 2 18 Chain Roller Spacer (Ø6.2 x Ø10 x 15.5mm) 1 22 Generator 1 23 Sensor Wire 1 24 Shaft (M6 x 1, Ø11.8 x 79.5mm) 1 25 Pulley Shaft (M6 x 1, Ø10 x 76.5mm) 3 26 Fan Axle 1 27 Hook Connector 1 28 Chain Connector 1 29 U Bolt 1 30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (6008ZZ) 6 34 Bearing (6008ZZ) 6 34 Bearing (6008ZZ) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 <td>15</td> <td>Outlet Perforation</td> <td>1</td>	15	Outlet Perforation	1
18 Chain Roller Spacer (ø6.2 x ø10 x 15.5mm) 1 22 Generator 1 23 Sensor Wire 1 24 Shaft (M6 x 1, ø11.8 x 79.5mm) 1 25 Pulley Shaft (M6 x 1, ø10 x 76.5mm) 3 26 Fan Axle 1 27 Hook Connector 1 28 Chain Connector 1 29 U Bolt 1 30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6008ZZ) 6 34 Bearing (6008ZZ) 6 34 Bearing (6008ZZ) 6 34 Bearing (6008ZZ) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 <tr< td=""><td>16</td><td>Spacer (ø8.2 x ø12 x 3.2mm)</td><td></td></tr<>	16	Spacer (ø8.2 x ø12 x 3.2mm)	
22 Generator 1 23 Sensor Wire 1 24 Shaft (M6 x 1, Ø11.8 x 79.5mm) 1 25 Pulley Shaft (M6 x 1, Ø10 x 76.5mm) 3 26 Fan Axle 1 27 Hook Connector 1 28 Chain Connector 1 29 U Bolt 1 30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (6008ZZ) 6 34 Bearing (6008ZZ) 6 34 Bearing (6008ZZ) 6 34 Bearing (6008ZZ) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord 1 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1	17	Long Spacer (ø8.2 x ø12 x 71.6mm)	2
23 Sensor Wire 1 24 Shaft (M6 x 1, ø11.8 x 79.5mm) 1 25 Pulley Shaft (M6 x 1, ø10 x 76.5mm) 3 26 Fan Axle 1 27 Hook Connector 1 28 Chain Connector 1 29 U Bolt 1 30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (6008ZZ) 6 34 Bearing (608ZZ) 6 34 Bearing (608ZZ) 6 34 Bearing (608ZZ) 6 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42	18	Chain Roller Spacer (ø6.2 x ø10 x 15.5mm)	1
24 Shaft (M6 x 1, Ø11.8 x 79.5mm) 1 25 Pulley Shaft (M6 x 1, Ø10 x 76.5mm) 3 26 Fan Axle 1 27 Hook Connector 1 28 Chain Connector 1 29 U Bolt 1 30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (608ZZ) 6 34 Bearing (608ZZ) 6 34 Bearing (6002RS) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 <td>22</td> <td>Generator</td> <td>1</td>	22	Generator	1
25 Pulley Shaft (M6 x 1, ø10 x 76.5mm) 3 26 Fan Axle 1 27 Hook Connector 1 28 Chain Connector 1 29 U Bolt 1 30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (608ZZ) 6 34 Bearing (608ZZ) 6 34 Bearing (608ZZ) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47	23	Sensor Wire	1
26 Fan Axle 1 27 Hook Connector 1 28 Chain Connector 1 29 U Bolt 1 30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (608ZZ) 6 34 Bearing (6201RS) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Bushing 2	24	Shaft (M6 x 1, ø11.8 x 79.5mm)	1
27 Hook Connector 1 28 Chain Connector 1 29 U Bolt 1 30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (6008ZZ) 6 34 Bearing (6201RS) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 1 50 Pulley Bushing 2 51 Seat 1	25	Pulley Shaft (M6 x 1, ø10 x 76.5mm)	3
28 Chain Connector 1 29 U Bolt 1 30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (608ZZ) 6 34 Bearing (6201RS) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Bushing 2 50 Pulley Bushing 2 51 Seat 1	26		
29 U Bolt 1 30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (608ZZ) 6 34 Bearing (6201RS) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Bushing 2 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1	27	Hook Connector	1
30 Inner Spacer 1 31 Outer Collar 1 32 Bearing (6003RS) 1 33 Bearing (608ZZ) 6 34 Bearing (6201RS) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (Ø10 x Ø16 x 30.5mm) 2 49 Pulley Spacer (Ø10 x Ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1<	28	Chain Connector	1
31 Outer Collar 32 Bearing (6003RS) 33 Bearing (608ZZ) 34 Bearing (6201RS) 35 One-way Bearing (HF2016) 36 Chain, (1/4" pitch) 37 Sprocket 38 Bungee Cord 39 Bungee Cord Pulley 40 Chain Roller 41 Bearing (6000ZZ) 42 Damper 43 Right Fan Cage 44 Left Fan Cage 44 Left Fan Cage 45 Pedal Cap 46 Toe Piece 47 Pedal Strap 48 Small Chain Roller Spacer (Ø10 x Ø16 x 30.5mm) 49 Pulley Spacer (Ø10 x Ø16 x 30.5mm) 50 Pulley Bushing 51 Seat 52 Handlebar Holder 53 Joint Cover 54 Fixed Joint Cover 55 Generator Base 56 Damper Securing Cap 1	29	U Bolt	
32 Bearing (6003RS) 1 33 Bearing (608ZZ) 6 34 Bearing (6201RS) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover <td< td=""><td></td><td>·</td><td></td></td<>		·	
33 Bearing (608ZZ) 6 34 Bearing (6201RS) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap			
34 Bearing (6201RS) 3 35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap <	32	Bearing (6003RS)	
35 One-way Bearing (HF2016) 1 36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1	33	Bearing (608ZZ)	
36 Chain, (1/4" pitch) 1 37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1	34		
37 Sprocket 1 38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1		· · · · · · · · · · · · · · · · · · ·	
38 Bungee Cord 1 39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1			
39 Bungee Cord Pulley 4 40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1		•	
40 Chain Roller 2 41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1		<u> </u>	
41 Bearing (6000ZZ) 8 42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1		,	
42 Damper 1 43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1			
43 Right Fan Cage 1 44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1		Bearing (6000ZZ)	
44 Left Fan Cage 1 45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1			1
45 Pedal Cap 2 46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1			=
46 Toe Piece 2 47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1		<u> </u>	
47 Pedal Strap 2 48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1		·	
48 Small Chain Roller Spacer (ø10 x ø16 x 30.5mm) 2 49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1			
49 Pulley Spacer (ø10 x ø16 x 26.5mm) 1 50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1		•	
50 Pulley Bushing 2 51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1		• • •	
51 Seat 1 52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1			
52 Handlebar Holder 1 53 Joint Cover 1 54 Fixed Joint Cover 1 55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1		,	
53Joint Cover154Fixed Joint Cover155Generator Base156Damper Securing Cap157Left Cover1			
54Fixed Joint Cover155Generator Base156Damper Securing Cap157Left Cover1			
55 Generator Base 1 56 Damper Securing Cap 1 57 Left Cover 1			
56 Damper Securing Cap 1 57 Left Cover 1			
57 Left Cover 1			
		· · · · · · · · · · · · · · · · · · ·	
58 Right Cover 1			
	58	Right Cover	1

PARTS LIST

PART#	PART NAME	QTY
59	Endcap (30mm x 60mm)	4
60	Connecting Plate	2
61	Bearing Cup (6001RS)	1
62	Bearing Cup (6003RS)	1
63	Guide Roller	2
64	Seat Roller	4
65	Roller Sleeve	2
66	Moving Wheel	2
67	Rail Cap	1
68	Main Frame Cap	1
70	Bottom Cover	1
71	Plastic Washer (ø10.2 x ø14 x 1mm thick)	3
72	Bolt, Round Head (M6 x 1 x 10mm)	11
73	Lock Washer, Internal Tooth (M6)	7
74	Nylock Nut (M6 x 1)	2
75	Screw, Round Head (ST4.2 x 10mm)	3
76	Washer (M6)	14
77	Bolt, Socket Head (M8 x 1.25 x 65mm)	2
78	Bolt, Button Head (M8 x 1.25 x 75mm)	1
79	Washer (M8)	19
80	Nylock Nut (M8 x 1.25)	9
81	Bolt, Socket Head (M8 x 1.25 x 12mm)	8
82	Bolt, Socket Head (M8 x 1.25 x 40mm)	2
83	Bolt, Flat Head (M6 x 1 x 16mm)	2
85	Bolt, Socket Head (M8 x 1.25 x 110mm)	2
86	Bolt, Button Head (M8 x 1.25 x 25mm)	2
87	Lock Washer (M8)	4
88	Screw, Round Head (ST4.2 x 16mm)	10
90	Bolt, Socket Head (M5 x 0.8 x 92mm)	4
91	Nut (M5 x 0.8)	4
92	Chain Hook	2
93	Inner C Ring (ø32)	1
94	Nylock Nut (M10 x 1.5)	2
95	Screw, Round Head Self-Tapping (ST4.2 x 6mm)	6
96	Bolt, Socket Head (M4 x 0.7 x 45mm)	1
97	Nut (M4 x 0.7)	1
98	Pull Pin	1
99	Bolt, Socket Head (M6 x 1 x 16mm)	13
100	Bolt, Round Head (M6 x 1 x 30mm)	1
101	Bolt, Round Head (M6 x 1 x 10mm)	7
102	Screwdriver	1
103	Allen Wrench (6mm)	2
104	Wrench	1
105	Nut (M6 x 1)	2
106	PU Spacer	2
107	Grommet Plug	1
108	Bearing (6001RS)	1
109	Weight	3
110	Bearing Housing	1

PARTS LIST

PART#	PART NAME	QTY
111	Bolt, Socket Head (M4 x 0.7 x 12mm)	3
112	Washer (ø3.5 x ø12 x 1mm thick)	2
113	Screw, Round Head (ST3.5 x 12mm)	2
114	Magnet Ring	1
115	Caution Label	1
116	Heart Rate Transmitter	1
117	Elastic Sensor Strap	1
118	Battery Rubber Ring	1
119	Battery Cover	1
120	Button Battery (CR2032)	1
121	Seat Stopper	2
122	Bolt, Socket Head (M8 x 1.25 x 20mm)	2
123	Stopper Bracket	2
124	Strap Jacket	2
125	Jacket Plate	2
126	Screw, Flat Head (M5 x 0.8 x 12mm)	4
129	Serial Decal	1
130	Manual	1
132	Bolt, Round Head (M6 x 1 X 30mm)	1
133	Lock Washer (M6)	1
134	Thick Nylock Nut (M6 x 1)	2
135	Screw, Round Head Self-Tapping (ST4.2 X 10mm)	8
139	Handlebar	1
141	Bolt, Round Head (M6 X 1 x 12mm)	2
143	Computer	1
144	Computer Post	1
145	Extension Post	1
146	Shaft Bolt	1
147	Shat Spacer	1
148	Rotating Bushing	2
149	Large Pedal Shaft (ø16mm)	1
150	Pedal Shaft (ø12mm)	1
156	Phone Clamp	1
157	Rubber Band	1
158	Left Rail Gasket	1
159	Right Rail Gasket	1
163	EVA Pad	1
164	Short EVA Pad	1
166	Screw, Round Head (ST4.2 x 35mm)	3
173	Bolt, Socket Head (M8 X 1.25 x 20mm)	4
174	Carriage Cover	1
175	Main Frame	1
176	Rail Frame	1
177	Pedal Support	2
178	Securing Cap	4
179	Mounting Cap	1

TO CONTACT CUSTOMER CARE

For your convenience, Stamina's customer care representatives can be reached by email at **customer.care@staminaproducts. com** or by phone at 1-800-375-7520 (in the U.S.). Our customer care representatives are available Monday through Thursday from 7:30 a.m. until 5:00 p.m., and Friday 8:00 a.m. until 3 p.m. Central Time.



ONLINE
CUSTOMER CARE
customer.care@staminaproducts.com
www.staminaproducts.com









STAMINA PRODUCTS, INC. ATTN: Customer Care 2040 N Alliance Ave, Springfield, MO 65803

Would you like to recieve email information or special offers from Stamina Products? Register at contact.staminaproducts.com

TO REGISTER YOUR PRODUCT

To enact your warranty, please register your product by going to register.staminaproducts.com. Please have your product model number (printed on the cover of this owner's manual) and the serial number (printed on the black and white sticker on your product) ready.

If you don't have internet access, you can call customer care at 1-800-375-7520, or fill out and mail the product registration form below to Stamina Products, Inc.; 2040 N Alliance Ave, Springfield, MO 65803.

PRODUCT REGISTRATION FORM	Stamina Produ	,	
	2040 N Alliance Ave, Spr	ingtiela, MO 6580	3
Model Number:		Serial Number:	
Product Name:			
Place Purchased:			
Date of Purchase:		Purchase Price: .	
First Name:		Last Name:	
City:	State:		Zip Code:
Email Address:		Phone #: ()
Would you like to receive email information of	r special offers from Stamina Product	s?*Yes	_No *If yes, be sure your email address is included above.
	Detach and Mail or Fax	the Form Above	fo
TO ORDER PARTS			
f there are missing or damaged part	s, you can go to parts.stamin	aproducts.con	n and order those parts. If you have questions
		order parts b	y mail, fill out the sheet below and fax it to
117-889-8064. The part will be mailed	I to your address.		
%	Detach and Mail or Fax	the Form Below	÷
PARTS ORDER FORM	Stamina Bradi		
PARTS ORDER FORM	Stamina Produ 2040 N Alliance Ave, Spr		3
Mr./Ms:			
Address:			Apt. #:
City:			·
IMPORTANT : We re	quire your phone number to proces	ss the order!	·
Phone #: ()		Work Phone #: ()

IMPORTANT: Before filling out the portion below, make sure you have the correct information.

PART#	DESCRIPTION	QUANTITY
EXAMPLE: 1	Rear Unit Assembly	1